

CIVIL ENGINEERING SERVICES

Wallacia Country Club Development Application



DOCUMENT CONTROL

01	6th December 2019	Issue for Development Application	Current
Rev #	Date	Description of Change	Status

APPROVALS

01	Martyna Czarnota <i>Junior Engineer – Civil and Water Engineering</i>	Michael Cahalane <i>Director – Civil and Water Engineering</i>
Rev #	Author	Approver

PREPARED BY:

WARREN SMITH & PARTNERS PTY LTD

Consulting Engineers

ACN 002 197 088 **ABN** 36 300 430 126

Level 9, 233 Castlereagh Street

Sydney 2000 NSW Australia

T 02 9299 1312



PREPARED FOR:

ST JOHNS PARK BOWLING CLUB LTD

93 Edensor Road

St Johns Park 2176 NSW Australia

T 02 9610 3666





CONTENTS

1. INTRODUCTION..... 2

2. ABBREVIATIONS AND DEFINITIONS..... 4

3. EXISTING STORMWATER DRAINAGE..... 5

4. AUTHORITY AND REGULATORY REQUIREMENTS..... 6

5. PROPOSED STORMWATER DRAINAGE SYSTEM 7

6. WATER QUALITY REQUIREMENTS AND PROPOSED TREATMENT SYSTEM 9

7. SEDIMENT & EROSION CONTROL 14

CIVIL ENGINEERING SERVICES

1. INTRODUCTION

Warren Smith and Partners (WS+P) has been engaged by St Johns Park Bowling Club to prepare a Development Application for the redevelopment of the existing Wallacia Country Club.

The Country Club redevelopment will include the following works:

- Refurbishment and extension to the existing Country Club building;
- Construction of a new learn to swim pool, gym and bowling green;
- 40 additional car parking spaces.

This report outlines a stormwater strategy associated with the proposed development and aims to address the following: -

- Proposed Stormwater Drainage Works
- On-Site Detention (OSD);
- Freeboard Requirements;
- Water Quality Requirements and Proposed Treatment System, and;
- Sediment and erosion control.

1.1 BACKGROUND

The existing site is a privately-owned golf club located, at 13 Park Road, Wallacia, approximately 13.5km south of Penrith city centre. The existing country club is surrounded by commercial and residential buildings to the west, the existing golf course to the north and east, and Park Road to the south. The adjoining golf course will be redeveloped from an 18-hole course to a 9-hole course accessible through the country club building.

Please refer to Figure 1.1 which illustrates the extent within which the proposed works are to be undertaken.



Figure 1.1: Aerial View of Existing Property Boundary (Source: Near Maps)

2. ABBREVIATIONS AND DEFINITIONS

AEP	Annual Exceedance Probability
AHD	Australian Height Datum
ARI	Average Recurrence Interval
ARR	Australian Rainfall and Runoff
DA	Development Application
DCP	Development Control Plan
DN	Diameter Nominal (mm)
EY	Exceedances per Year
IFD	Intensity-Frequency-Duration
IL	Invert Level
L/s	Litres per second
LGA	Local Government Area
m/s	Metres per second
MUSIC	Model for Urban Stormwater Improvement Conceptualisation
OSD	On-Site Detention
PCC	Penrith City Council
RCP	Reinforced Concrete Pipe
RL	Reduced Level
RWT	Rainwater Reuse Tank
SID	Safety In Design
WSC	Water Services Coordinator
WS+P	Warren Smith and Partners
WSUD	Water Sensitive Urban Design

The Use of Must, Shall & Should:

In accordance with the International Organization for Standardisation (ISO) Directives, the word “shall” is used to state that a requirement is strictly to be followed in order to conform to a Performance Requirement. Consequently, there can be no deviation from that requirement, other than a specific tolerance.

It is noted that in legislation and specifications it is common to use the word “must” to express a requirement. The word “shall” in this document should be considered as equivalent to “must” in the legislation.

The word “should” introduces a suggestion or recommendation that is not a requirement. It is not necessary that such recommendations or suggestions be followed in order to comply with the Performance Requirement.

3. EXISTING STORMWATER DRAINAGE

A desktop review was undertaken to determine the existing drainage infrastructure within the development area. The review revealed the following:-

- The land around Wallacia Golf Club grades in a direction of North-East at a grade of approximately 3-4%;
- There are seven existing (7) pits located within the development.
- There is an existing pit and pipe drainage system on Park Road which consists of kerb inlet pits.
- Jerry's Creek runs in a south-north direction and is located approximately 150m east of the existing country club;
- The existing golf course and proposed golf course drainage is discharged to Jerry's Creek.

The existing site topography and levels on Park Road suggests the existing stormwater drainage network within the site discharges to Jerry's Creek. This will be confirmed during the detailed design phase of the project.

Please refer to Figure 3.1 for an illustration of the existing stormwater infrastructure and site grading.

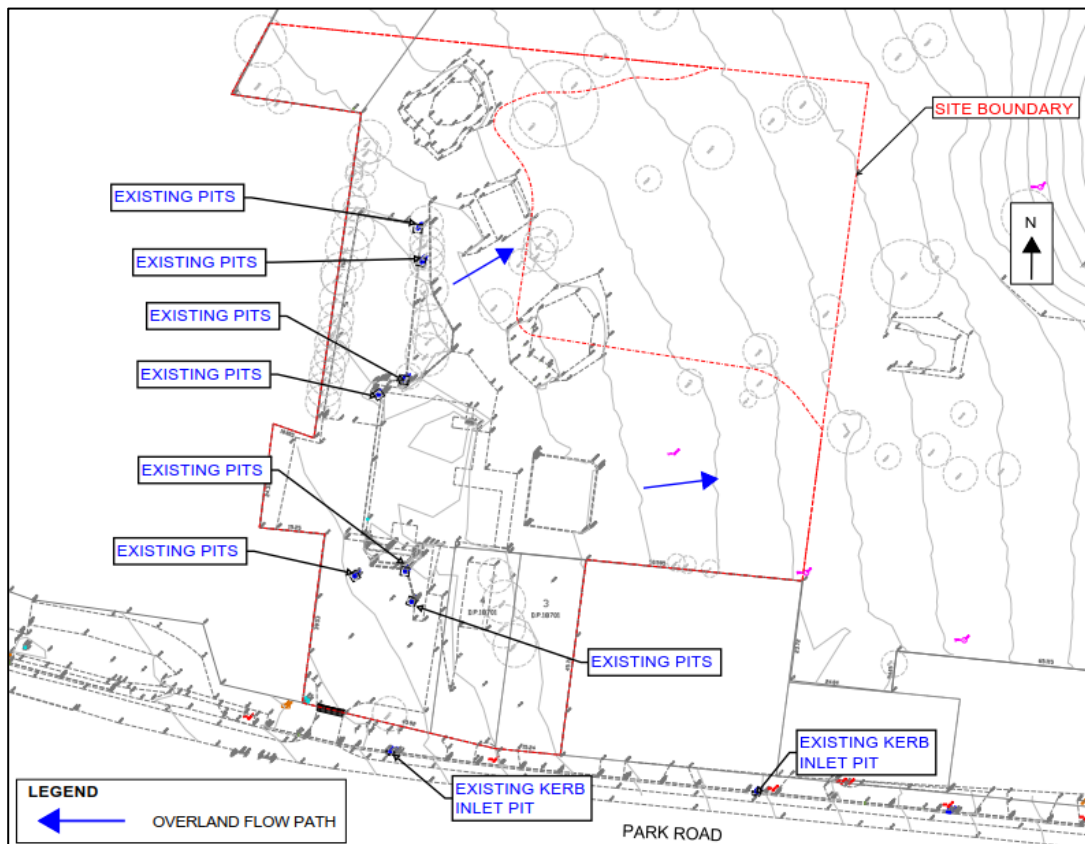


Figure 3.1: Existing Site Stormwater Network and Site Grading

4. AUTHORITY AND REGULATORY REQUIREMENTS

With reference to the Penrith City Council (PCC) Development Control Plan (DCP) 2014, PCC Stormwater Drainage Specification for Building Developments, dated November 2016, and PCC WSUD Technical Guidelines 2015, the Council requirements are as presented in the following sub-sections.

4.1 STORMWATER DRAINAGE AND ON SITE DETENTION (OSD) REQUIREMENTS

- The minor, or piped, stormwater system shall be designed to cater for all storm events up to, and including, the 5% AEP storm event;
- The major stormwater system, or overland flow paths, shall be designed to cater for all storm events up to, and including, the 1% AEP storm event;
- OSD systems shall be designed to cater for all storm events up to, and including, the 1% AEP storm event;
- Post development discharge rates shall not exceed pre-development discharge rates for all storm events up to, and including, the 1% AEP storm event.

4.2 FREEBOARD REQUIREMENTS

Refer to Table 4.1 for the freeboard requirements for developments requiring OSD.

Table 4.1: Freeboard Requirements

Type	Freeboard (mm)
Residential, Industrial or Commercial Floor Levels	300*
Garage Floor Levels for Residential Dwellings	100
Entry Crest to Basement Carparks	300

**May be reduced in exceptional circumstances where there is no risk to the development*

4.3 WATER SENSITIVE URBAN DESIGN (WSUD)

Minimum pollutant reduction targets adopted are in accordance with Penrith City Council DCP requirements for water quality. Refer to Table 4.2 for the pollutant reduction targets.

Table 4.2: WSUD Pollutant Reduction Targets

Pollutant Type	Percentage (%) Retention of Post Development Loads
Gross Pollutants (GP)	90%
Total Suspended Solids (TSS)	85%
Total Phosphorus (TP)	60%
Total Nitrogen (TN)	45%

5. PROPOSED STORMWATER DRAINAGE SYSTEM

The proposed site has a total development area of approximately 0.7480Ha. The majority of the site, consisting mainly of existing and proposed car park areas, existing and proposed roof drainage shall be captured via a pit and pipe system. There are 4no. existing stormwater pits to be removed from the development due to the extension of the country club with the remaining 3no. stormwater pits located towards the front of the property to be retained. The stormwater captured in the proposed system shall reticulate to an OSD tank located at the back of the proposed car park. The OSD shall have a $\varnothing 375$ low level outlet and $\varnothing 250$ high level outlet that will both be controlled by separate orifice plates which shall be bolted to the tank wall. The treated stormwater discharged from the OSD tank shall connect to the proposed golf course drainage at the eastern boundary of the site. The golf course drainage shall convey the stormwater for a further approximate 180m discharging directly to Jerry's Creek.

Refer to Table 5.1, below, for a catchment breakdown. Refer to drawing 6.01 & 6.02 for the stormwater layout plan and drawing 6.03 for the proposed stormwater catchment plan.

Table 5.1: Breakdown of Proposed Development Site Catchment

Catchment	Impervious Area (Ha)	Pervious Area (Ha)	Total Area (Ha)
OSD			
Ground to OSD Tank	-	-	0.6341
Proposed Roof Area to OSD	-	-	0.0956
Total to OSD			0.7297
Bypass			
Ground Area	-	-	0.0183
Total Area (Ha)	-	-	0.07480

5.1 DRAINS INPUT PARAMETERS

The site discharges have been calculated using a DRAINS model, which is a stormwater drainage system design and analysis program. DRAINS performs hydraulic grade line analysis and generates flows that occur in a drainage system for a particular AEP storm event.

The catchment characteristic factor values for the development site used in the DRAINS model are listed below:-

- Soil Type – Normal 3.0
- Paved (Impervious) Area Depression Storage 1mm
- Supplementary Area Depression Storage 1mm
- Grassed (Pervious) Area Depression Storage 5mm
- Antecedent Moisture Condition 3.0
- Minimum Pit Blockage (Sag Pits) 0.5
- Minimum Pit Blockage (On-Grade Pits) 0.3
- Minimum Pit Freeboard 150mm

The rainfall data has been taken from the Bureau of Meteorology Rainfall IFD Data System using local coordinates. ARR 2016 procedures have been adopted for modelling purposes.

5.2 SITE DISCHARGE RESULTS

In order to comply with the PCC's stormwater drainage requirements, the existing site and proposed development were both modelled in DRAINS. As the existing site consists mainly of landscaped areas with a sealed carpark area, when modelling the pre-development scenario, the site has been split into 29% impervious area and 71% pervious area.

Refer to Table 5.2 for the pre-development and post development discharge flows.

Table 5.2: Total Site Discharge Results

Storm Event (% AEP)	Pre-Development Area Discharge (L/s)	Post Development Area Discharge (L/s)
50% AEP Event	125	123
20% AEP Event	218	156
10% AEP Event	297	270
5% AEP Event	357	328
2% AEP Event	440	384
1% AEP Event	506	481

6. WATER QUALITY REQUIREMENTS AND PROPOSED TREATMENT SYSTEM

In order to comply with the PCC requirements for the adequate treatment of stormwater runoff, treatment solutions have been provided to remove suspended solids, hydrocarbons, and nutrients prior to being discharged from site.

The pollutants that could potentially be generated as a result of the development are as follows:-

- Litter;
- Sediments, and;
- Nutrients (Phosphorus and Nitrogen).

The development has been modelled to demonstrate the performance of the stormwater treatment system utilising a program called MUSIC. MUSIC models the proposed stormwater treatment devices and estimates their respective performance against the performance targets of the project. The pollutants modelled in MUSIC are Gross Pollutants (GP), Total Suspended Solids (TSS), Total Phosphorus (TP) and Total Nitrogen (TN).

6.1 RAINFALL

The rainfall data to be used in the MUSIC model will be based on the Bureau of Meteorology data from a Sydney rainfall station. Refer to Table 6.1 and Table 6.2 for the rainfall and potential evapotranspiration data (PET) data respectively.

Table 6.1: Rainfall Data for MUSIC Modelling

Rainfall Station	Rainfall Period	Rainfall Period Dates	Time Step
067113 Penrith Lakes AWS	10 years	Jan 1999 – Dec 2008	6 minutes

Table 6.2: Monthly Evapotranspiration Data for MUSIC Modelling

Month	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
PET (mm)	159	122	115	77	50	39	41	57	81	122	142	152

6.2 RAINFALL RUNOFF PROPERTIES

In accordance with the NSW MUSIC Modelling Guidelines, August 2010, Table 6.3 and Table 6.4 present the rainfall runoff properties which have been used in the MUSIC model.

Table 6.3: Soil Properties for MUSIC Source Nodes

Parameter	Units	Urban
Impervious Area Parameters		
Rainfall Threshold	mm	0.3 (for roofs) 1.5 (for landscaped areas) 1.5 (for roads)
Pervious Area Parameters		
Soil Capacity	mm	105
Initial Storage	%	30
Field Capacity	mm	70
Infiltration Capacity Coefficient – a		150
Infiltration Capacity Coefficient – b		3.5
Groundwater Properties		
Initial depth	m	10
Daily Recharge Rate	%	25
Daily Baseflow Rate	%	10
Deep Seepage	%	0

Table 6.4: Stormwater Water Quality Parameters for MUSIC Source Nodes

Land-Use Category		Log ₁₀ TSS (mg/L)		Log ₁₀ TP (mg/L)		Log ₁₀ TN (mg/L)	
		Storm Flow	Base Flow	Storm Flow	Base Flow	Storm Flow	Base Flow
General Urban	Mean	2.15	1.20	-0.60	-0.85	0.30	0.11
	Std Dev	0.32	0.17	0.25	0.19	0.19	0.12
Roof Areas	Mean	1.30	*	-0.30	*	0.34	*
	Std Dev	0.32	*	0.25	*	0.19	*

*Base flows are only generated from pervious areas; therefore these parameters are not relevant to impervious areas

6.3 STORMWATER TREATMENT PLAN

The MUSIC model's total catchment area to be treated is 0.7480Ha. The proposed site treatment shall utilise two products by Ocean Protect. The first level of treatment shall include OceanGuard, which intercepts surface runoff at the pit grates and filters the runoff prior to entering the piped stormwater system. It is proposed that fourteen (14) proposed grated stormwater pits on-site be fitted with OceanGuard filter baskets. The OceanGuard is fitted with a monofilament 200 micron pore size filter bag that removes gross pollutants such as sediment, trash and debris as well as suspended solids; please refer to Figure 6.1 for an illustration of a typical OceanGuard.



Figure 6.1: Typical OceanGuard Filter

The second treatment device which shall be incorporated into the system is a stormfilter system. To achieve the reduction targets, the OSD tank shall be fitted with six (6) 690mm phosphorous absorption cartridges. A Psorb Stormfilter cartridge system is provided to remove any remaining suspended sediments and nutrients which have entered the stormwater system, please refer to Figure 6.2 for an illustration of a typical Psorb Stormfilter.

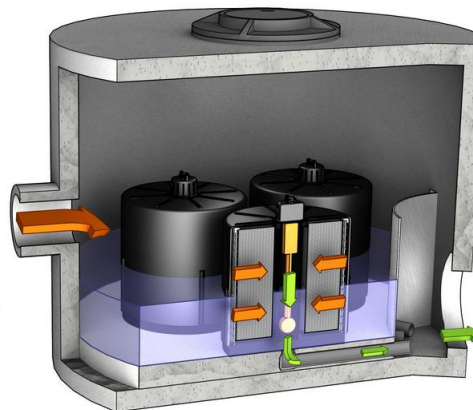


Figure 6.2: Typical PSorb Stormfilter

6.4 MUSIC MODEL TREATMENT RESULTS

The stormwater quality treatment system has been modelled using the MUSIC software. Please refer to Figure 6.3 for the treatment plan and Table 6.5, below for the treatment results.

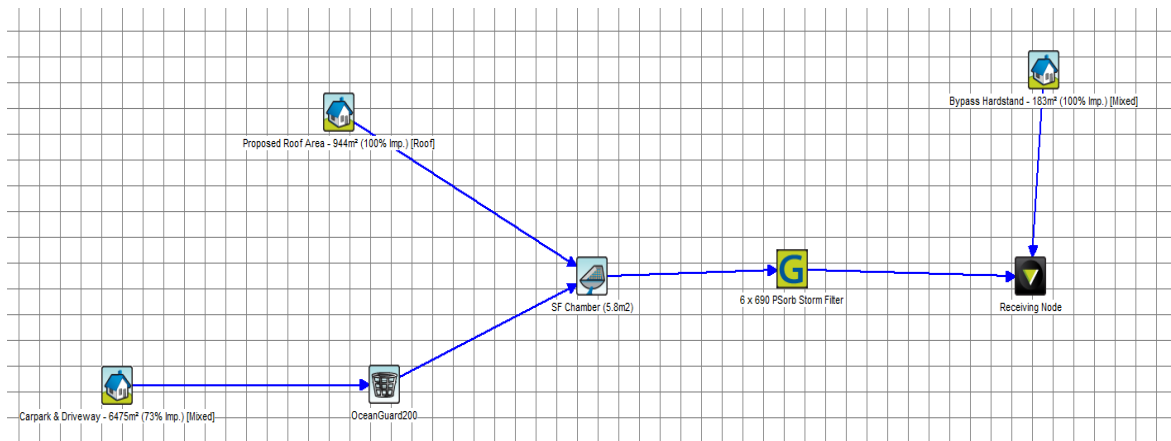


Figure 6.3: MUSIC Model Treatment Plans

Table 6.5: Percentage Based Load Reduction in Pollutant Results

Pollutant Type	Source (kg/yr)	Residual Load (kg/yr)	Reduction % Achieved	DCP Target Reduction (%)
Gross Pollutants (GP)	112	2.94	97.4	90
Total Suspended Solids (TSS)	638	67.4	89.4	85
Total Phosphorus (TP)	1.34	0.478	64.3	60
Total Nitrogen (TN)	10.1	5.53	45.2	45

6.5 STORMWATER TREATMENT MAINTENANCE MEASURES

In order to ensure the effective operation of treatment measures, regular maintenance must be undertaken for all of the systems. The following maintenance procedures are proposed for the proposed stormwater treatment measures.

The OceanGuard filter baskets are to undergo two (2) separate levels of maintenance, in accordance with Ocean Protect's recommendations; these being the inspection/minor maintenance, and the major maintenance. Minor maintenance, an inspection, is recommended to be undertaken twelve (12) times a year (monthly) and after major storm events, particularly during the first year of operation. Major maintenance is to be undertaken two (2) to six (6) times a year, with the frequency being adjusted to accommodate variable rainfall patterns; i.e. inspections are undertaken on a more frequent basis in months where higher volumes of rainfall are expected. It is recommended that the filter baskets are no more than two-thirds full when emptied as it may cause blockages of the overflow sections. For more details on maintenance requirements, refer to Ocean Protect's Operations and Maintenance Manual for OceanGuard.

The Psorb stormfilter cartridges, similarly to the OceanGuard filter baskets, are to undergo both minor maintenance and major maintenance. Minor maintenance is to be undertaken twice a year and after major storm events, and generally involve a visual inspection of the system and removal of vegetation and debris, as required. Major maintenance is to be undertaken once a year, and generally involves cartridge recharging and disposal of materials that require consideration of regulatory guidelines. For more details on maintenance requirements and factors influencing maintenance, refer to Ocean Protect's Operation, Design, Maintenance and Performance Manual for stormfilters.

The maintenance for the OceanGuard filter baskets and Psorb stormfilter cartridges are to be undertaken by a qualified and licenced Cleaning Contractor.

7. SEDIMENT & EROSION CONTROL

The Contractor for the works is required to provide Sedimentation and Erosion Control in accordance with the guidelines set out in Landcom's Managing Urban Stormwater Soils & Construction Guidelines and the general requirements outlined below.

7.1 SITE PROTECTION MEASURES

The Contractor for the works is required to provide Erosion and Sedimentation Control in accordance with the requirements outlined below to inhibit the movement of sediment off the site during demolition and construction phases.

7.1.1 SITE ACCESS

Site access shall be established from Park Road. Construction vehicles leaving the site shall be required to pass over a Temporary Construction Vehicle Entry consisting of a 1.5m long by 3m wide 'cattle rack'.

7.1.2 SEDIMENT CONTROL

All exposed earth areas where it may be possible for runoff to transport silt down slope shall be protected with a sediment and erosion control silt fence generally installed along the boundaries of the site.

The fence will be constructed in accordance with details provided by the Department of Conservation and Land Management incorporating geotextile fabric which will not allow suspended particles greater than 50mg/L non-filterable solids to pass through, and as such comply with the appropriate provisions of the Clean Waters Act 1970.

The construction of the silt fence will include the following: -

- Geotextile fabric buried to a maximum of 150mm below the surface.
- Overlapping any joins in the fabric;
- Turning up on the ends for a length of 1 metre in order to prevent volumes of suspended solids escaping in a storm event;
- Any Council owned road kerb entry and or gully pits will be protected by Atlantis Filter Bales and EcoSock. Additional protection will be provided by inserting Water Clean Filter Cartridges into the gully opening, and;
- Internal site drainage pits shall be protected by Sediment Traps consisting of hay bales.

Refer to Figure 7.1, Figure 7.2, Figure 7.3 and Figure 7.4 for details.

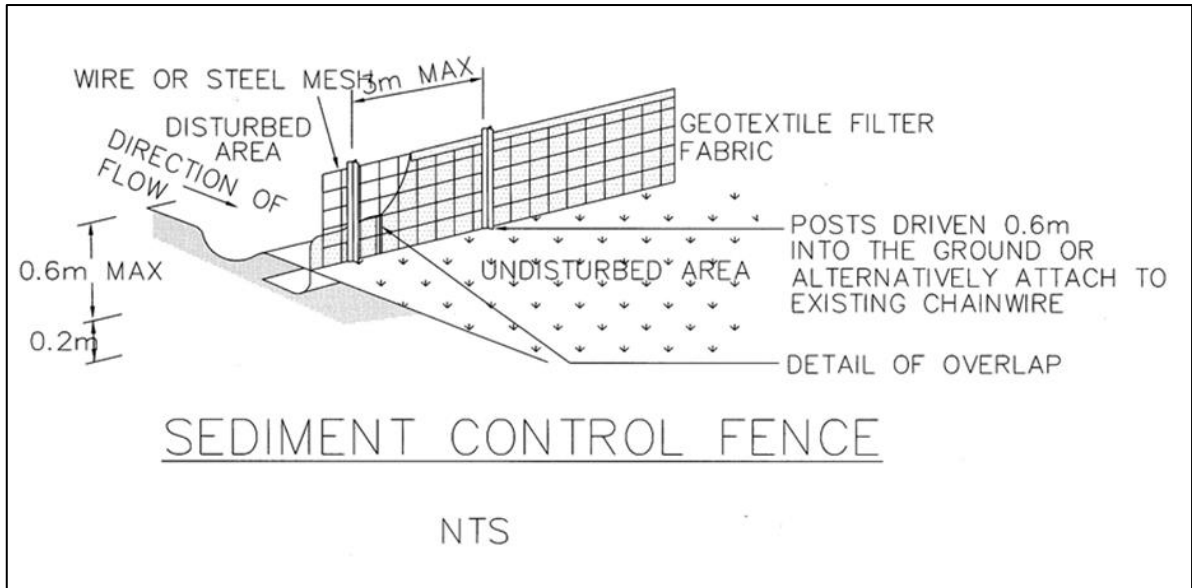


Figure 7.1: Sediment Control Fence Detail

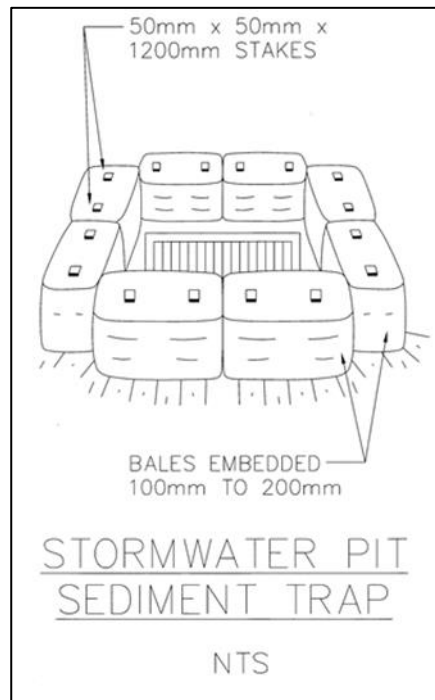


Figure 7.2: Stormwater Pit Sediment Trap Detail

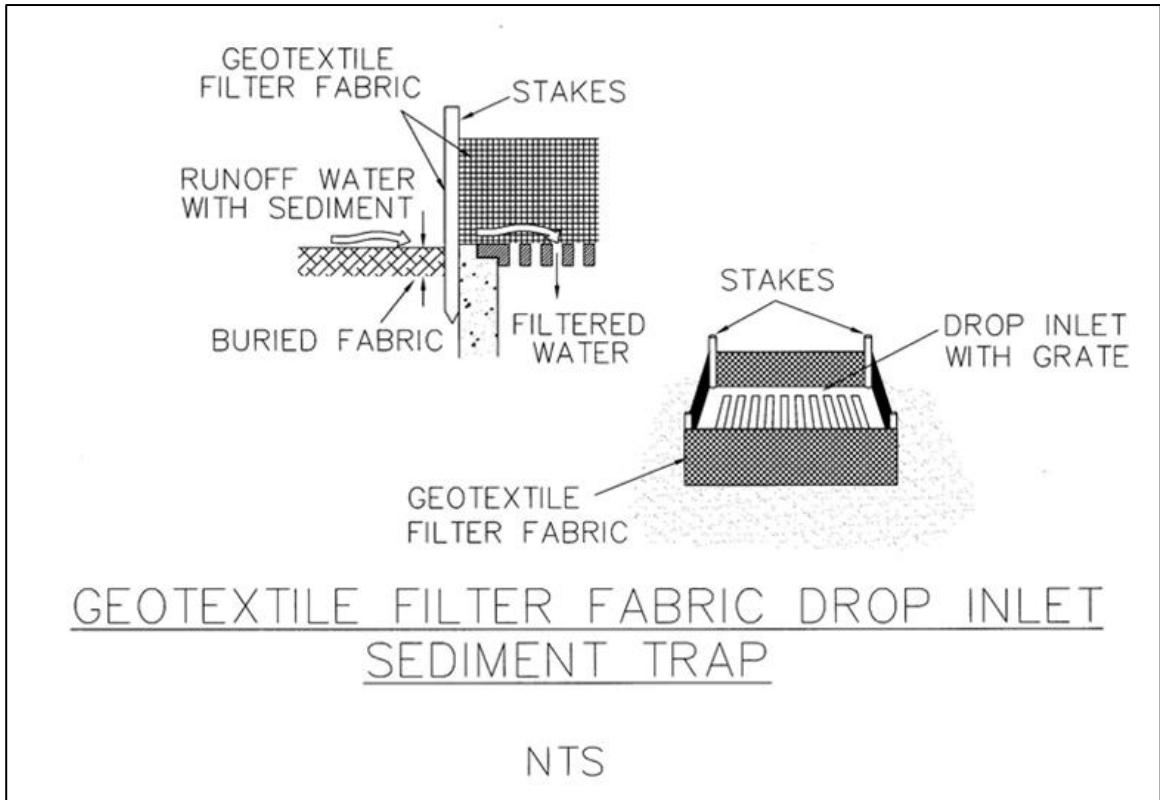


Figure 7.3: Geotextile Filter Fabric Drop Inlet Sediment Trap Detail

Atlantis Sediment Control Filter Bales



What are FilterBales?

Water Clean FilterBales are a unique new patented 7 stage sediment filter device developed to substantially reduce the migration of sediment and contaminants into drainage systems while allowing filtered water to easily pass through. FilterBales reduce customers' time and money by providing solutions to comply with environmental and regulatory requirements.

Durable, Dependable, Reusable.

Replacing hay bales and other inadequate attempts to stop sediment run-off, FilterBales are durable and re-useable, effectively stopping your money from "pouring down the drain". They are also lightweight and easy to handle. Replaceable Water Clean Filter Cartridges guarantee peak performance is maintained.

Ask your local FilterBales stockist about replacement frequencies in your area. Cartridges and filter covers should be changed when the infiltration rate decreases. Water Clean FilterBales are suitable for a wide range of sediment and water management situations and can be easily secured in place for long term use. The unique multi-directional filter system allows you to position Water Clean FilterBales in any direction without reducing performance.




Water Clean FilterBales can be fixed to concrete or bitumen surfaces using an epoxy mortar-binder or fixed to earth surfaces using 6-10 mm pegs or stakes. When positioning, the side with the red reflective marker should be facing traffic.





www.atlantiscorp.com.au 

1. **FilterBales frames** are a perforated plastic structure made from recycled wheelie bins, battery cases, milk bottles etc.
2. **Filter medium** (bio engineered soil media) used in the filter cartridges is made from a special blend of recycled organic (RO) materials from kerbside and vegetation drop off centres. The RO hosts enhanced naturally occurring micro-organisms. The blend also contains natural minerals to capture nutrients. The filter medium is as safe as normal soil.
3. **FilterBales** have a seven (7) stage filtration system:
 1. In through the filter bag
 2. Through the perforated plastic structure wall
 3. In through the filter cartridge bag
 4. Through the bio engineered filter medium
 5. Out through the filter cartridge bag
 6. Out through the perforated plastic structure wall
 7. Out through the filter bag
4. **The filter bag** is made from 300-micron (one third of a millimetre) pore size geotextile. This is the first stage that filters much of the sediment and other suspended solids from the run-off water. The geotextile is designed to stop sediment and reduce clogging but allow water to pass through easily. The filter cartridge bags are made from a similar geotextile.
5. **FilterBales** work effectively up to "a one-in-one-year 48 hours, 100 mm "storm events". This is the largest storm event experienced since the commercialisation of FilterBales. Having handled this easily, Filter Bales are considered capable of handling much greater "storm events". During these storm events FilterBales were used inside gully pits in one application and on the ground surrounding the gully pit in another application.
6. **EcoSocks** are made from a similar geotextile to the filter cartridge bags and contain the same bio engineered soil media as the FilterBales. They appear able to stand up to as much wear and tear as a sandbag.
7. **FilterBales** are much lighter (at around 15 kgs dry weight) than hay bales. This reduces exposure to Occupational Health and Safety problems

Product Range

Item No.	Description	
HFB001	High FilterBale , suitable for high flow situations and higher retention time applications. Contains two standard size WaterClean Filter Cartridges in upright formation to treat contaminated waters. (605mm x 485mm x 460mm)	
LFB002	Low FilterBale , suitable for low flow situations and kerb & gutter applications. Multi-directional module containing two standard size WaterClean Filter Cartridges. (605mm x 485mm x 220mm)	
ESF004	Directional EcoSock , can be used in conjunction with FilterBales to direct water. Will also provide some sediment filtration from seepage through bio-remediating media contained within the EcoSock (1135mm x 160mm x 30mm)	

Accessories

Item No.	Description	
FCR004	WaterClean Filter Cartridges contain a unique blend of fixating and bio-remediating products that treat common pollutants. To achieve maximum performance, each FilterBale uses two WaterClean Filter Cartridges. (440mm x 400mm x 100mm)	
HBC005 (High bale)	Replaceable FilterBale covers , made from specially designed geotextile. FilterBale covers have a standard aperture of 300 microns.	
HBC006 (Low bale)	Replaceable FilterBale covers , made from specially designed geotextile. FilterBale covers have a standard aperture of 300 microns.	

Atlantis Water Management Rebirth Pty Ltd trading as Atlantis Water Management
 Suite 402/781 Pacific Highway Chatswood NSW, 2067 Australia
 Phone • + 61 2 9419 6000 Fax • + 61 2 9419 6710
 Email • info@atlantiscorp.com.au Web Site • www.atlantiscorp.com.au



V3-20/08/01

Figure 7.4: Atlantis Sediment Control Filter Bale Detail

7.1.3 TEMPORARY STORMWATER SYSTEM (WHERE REQUIRED)

Site runoff within the zones of the excavation will be drained into a central holding well within the excavation. Runoff will be allowed to settle out suspended particles and debris, and an acceptable water of 50mg per litre of Non-Filterable Residues (NFR) is required to be achieved prior to discharge.

7.1.4 DUST CONTROL

The following dust control procedures will be adhered to:

- Loose loads entering or leaving the site will be securely covered by a tarpaulin or like material in accordance with RMS and local Council Guidelines;
- Soil transport vehicles will use the single main access to the site;
- There will be no burning of any materials on site;
- Water sprays will be used across the site to suppress dust. The water will be applied either by water sprinklers or water carts across ground surfaces whenever the surface has dried out and has the potential to generate visible levels of dust either by the operation of equipment over the surface or by wind. The watercraft will be equipped with a pump and sprays;
- Spraying water at the rate of not less than three (3) L/s and not less than 700kPa pressure. The area covered will be small enough that surfaces are maintained in a damp condition and large enough that runoff is not generated. The water spray equipment will be kept on site during the construction of the works;
- During excavation all trucks/machinery leaving the site will have their wheels washed and/or agitated prior to travelling on Council Roads, and;
- Fences will have shade cloth or similar fabric fixed to the inside of the fence.

7.1.5 MAINTENANCE

Generally, the following maintenance measures shall be adhered to during construction:-

- It will be the responsibility of the site foreman for the building contractor to ensure sediment and erosion control devices on site are maintained. The devices shall be checked daily and the appropriate maintenance undertaken as necessary;
- Prior to the closing of the site each day, the road shall be swept and materials deposited back onto the site;
- Gutters and roadways will be kept clean regularly to maintain them free of sediment;
- Appropriate covering techniques, such as the use of plastic sheeting will be used to cover excavation faces, stockpiles and any unsealed surfaces;
- If dust is being generated from a given surface, and water sprays fail;
- If fugitive emissions have the potential to cause the ambient air quality to foul the ambient air quality;
- The area of soils exposed at any one time will be minimised wherever possible by excavating in a localised progressive manner over the site,;
- Materials processing equipment suitable comply with regulatory requirements. The protection will include the covering of feed openings with rubber curtains or socks, and;
- Suitable and approved bins shall be utilised for the containment of hard waste, including concrete slurries, building waste and litter. In the case of accidental spills, particularly within the public reserve, the material shall be swept and contained, and not washed into a gutter or waterway.

It is considered that by complying with the above, appropriate levels of protection are afforded to the site and the adjacent public roads, footpaths and environment.