



ENERGY EFFICIENCY REPORT

BASIX[®] Thermal Comfort Simulation Assessment

SITE ADDRESS

Lot 27A (#27) Fourth Avenue LLANDILO 2747

LOCAL GOVERNMENT AUTHORITY

Penrith City Council

CLIENT



COMMISSIONED BY

McDonald Jones Homes

DEPOSITED PLAN

2147

DWELLING TYPE

Single Storey

REFERENCE NUMBER

606239

ASSESSMENT DATE

7/02/2022

While care has been taken to ensure that information contained in this report is true and correct at the time of publication, changes in circumstances after the time of publication may impact on the accuracy of this information. Energy Advance Australia Pty. Ltd. (A.C.N. 60 933 2014) gives no warranty or assurance and make no representation as to the accuracy of any information or advice contained, or that it is suitable for your intended use.

Energy Advance and its employees and agents shall have no liability (including but not limited to liability by reason of negligence) to any person using this report, for any loss, damage, cost or expense whether direct, indirect consequential or special, incurred by, or arising by reason of, any person using or relying on the report and whether caused by reason of any error, omission or misrepresentation in the report or otherwise.

This report is not to be distributed, copied or modified in any way with the intention to disclose to any other party other than those involved in the project's specific approval process.

PROJECT CERTIFICATION SUMMARY

DESIGN AND APPROVED SOFTWARE INFORMATION


SIMULATION ENGINE Chenath Engine v3.21	Dwelling Areas (m ²)
EXPOSURE Suburban	INTERNAL AREAS (m ²) 326.68
ORIENTATION: 0	OUTDOOR AREAS (m ²) 42.83
NatHERS CLIMATE ZONE: 28	GARAGE/CARPORT (m ²) 37.79
BCA (NCC) CLIMATE ZONE: 6	TOTAL: 407.30

ASSESSMENT CALCULATIONS & SOFTWARE RESULTS

TARGET	(MJ/m ² .pa)	PROPOSED	(MJ/m ² .pa)	BUILD EFFICIENCY BENCHMARK
Heating:	55.7	Heating:	29.1	PASS: 62.7%
Cooling:	56.2	Cooling:	37.7	PASS: 39.4%
Total:	111.9	Total:	66.8	

DWELLING THERMAL PERFORMANCE PER ZONED AREAS

The heating and cooling loads indicated are the simulated annual energy usages (MJ) for this home. The higher the load, the more energy needed to achieve thermal comfort.

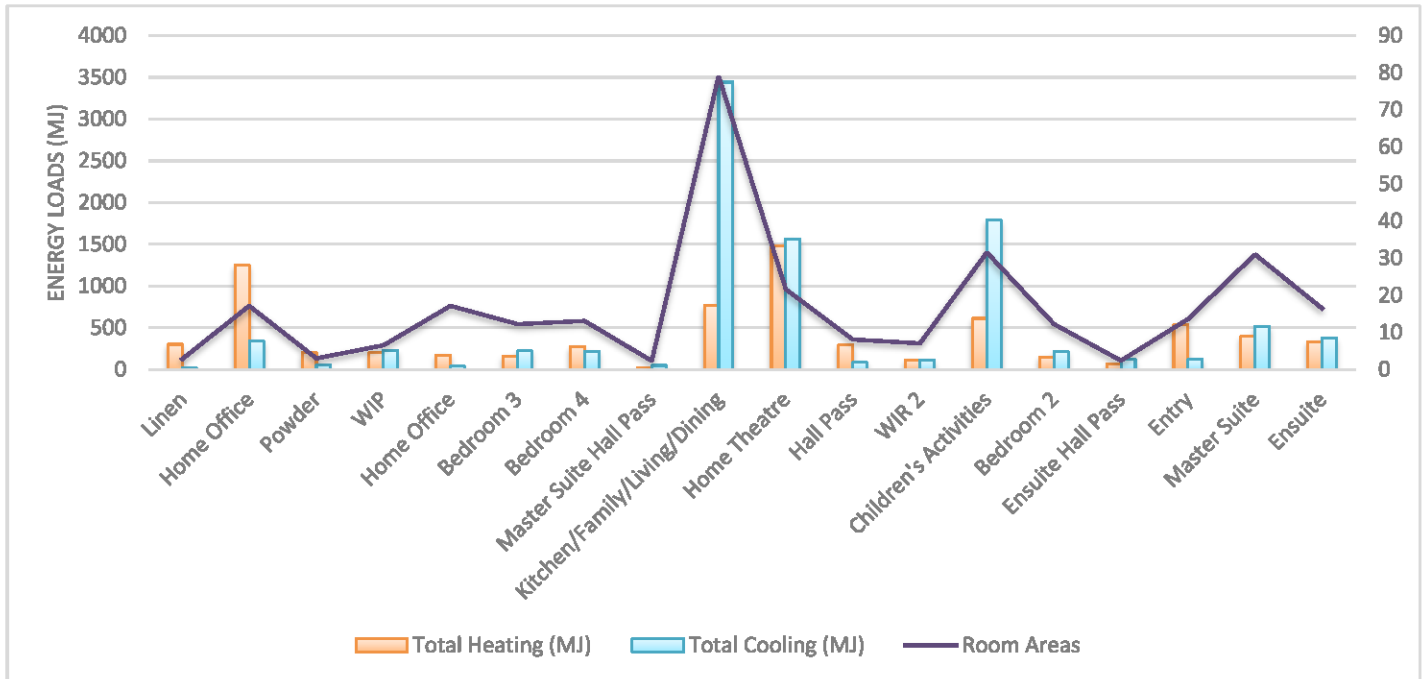


STATEMENT OF COMPLIANCE

I / We certify that we are specialists in the relevant discipline and the following design documents comply with the relevant requirements of the National Construction Code (NCC Volume One/Two as applicable) in relation to thermal performance and the relevant Australian Standards specified in this report.

ASSESSOR NAME: [REDACTED]
 SIGNATURE: [REDACTED]

RELEVANT QUALIFICATION STATEMENT

Certificate IV in NatHERS Assessment (Credential Number: TRF0002560)
 Residential Building Thermal Performance Assessment (91318NSW) Course
 Assessor Accrediting Organisation (AAO) Accreditation Number: **VIC/BDV/14/1662 | ABSA/61846**

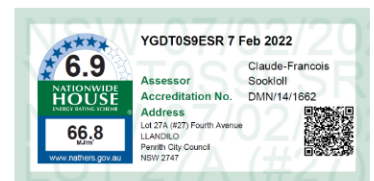

BUILDING SPECIFICATION SUMMARY

EXTERNAL WALLS

	CONSTRUCTION TYPE	INSULATION	NOTES
EXTERNAL WALLS	Brick Masonry	None	To the Front Elevation Garage wall (as per drawings)
	Brick Veneer	None	To the remainder of Garage external walls
	Framed	R2.0 Batts (with wall wrap)	To the façade (as per drawings)
	Brick Veneer	R2.0 Batts	To the remaining House area

ADDITIONAL NOTES

Location of Construction Materials as per drawings | Please note, a non-reflective vapour permeable wall wrap has been modelled to the framed external walls of this dwelling

INTERNAL WALLS

	CONSTRUCTION TYPE	INSULATION	NOTES
INTERNAL WALLS	Framed	R2.0 Batts	To the Garage internal walls
	Framed	None	To the remaining internal walls

ADDITIONAL NOTES

None

ROOF AND CEILING

	CONSTRUCTION TYPE	INSULATION	NOTES
ROOF	Colorbond (ventilated)	R1.3 Roof Blanket	Approx. 26°00' Roof Pitch
CEILING	Plasterboard	R4.1 Insulation	Main House Area Only
	Plasterboard	None	Garage Ceiling Area

ADDITIONAL NOTES

Location of ceiling insulation as per drawings | Solar absorbance: Dark


FLOOR

	CONSTRUCTION TYPE	INSULATION	NOTES
FLOOR	300mm Waffle 85mm Slab	Integrated	Throughout Ground Floor

ADDITIONAL NOTES


Floor Coverings modelled as per Drawings and NatHERS Protocols

GLASS TYPE	COLOUR	FRAME	U _w VALUE	SHGC	NOTES
Standard	Clear	Aluminium	6.54	0.67	Awning Windows
Standard	Clear	Aluminium	6.30	0.75	Double Hung Windows
Standard	Clear	Aluminium	6.19	0.74	Sliding Doors
Standard	Clear	Aluminium	6.43	0.76	Sliding Windows
Standard	Clear	Aluminium	5.90	0.72	Fixed Windows
Standard	Clear	Aluminium	6.24	0.74	Stacker Doors

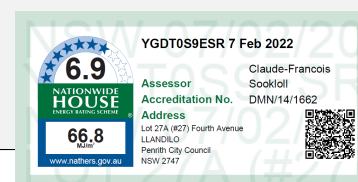

Note: Only a +/-5% SHGC tolerance is allowed with this rating. NB: This tolerance ONLY applies to SHGC, the U-value can always be lower but not higher than the values stated in the report. If any of the windows selected are outside the 5% tolerance then this certificate is no longer valid and the dwelling will need to be re-rated to confirm compliance.

GLAZING AREA DIRECTIONS

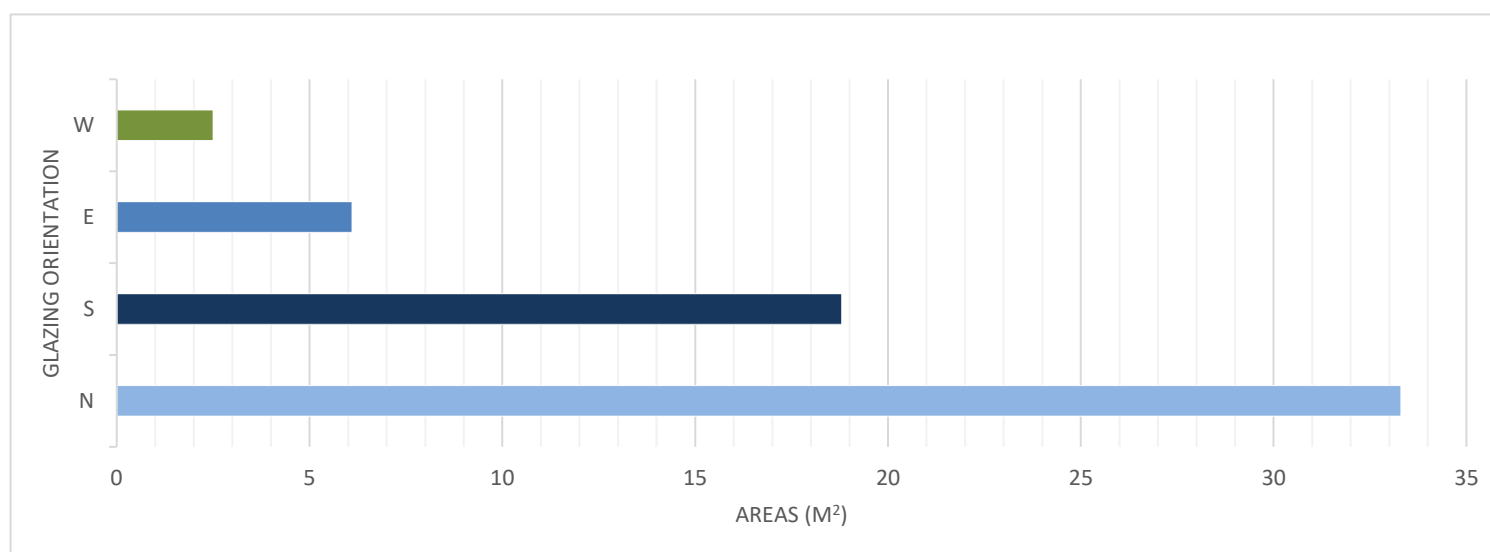

The chart above indicates the direction of all glazed doors and windows on the external envelope of the dwelling. To increase the thermal performance of the dwelling:

1. Maximise unsheltered northern-aspect glazing.
2. Keep west-facing glazing as small as possible: total window area should be less than 5% of the home's total floor area.
3. Keep south-facing glazing reasonably small: total window area should be less than 5% of the home's total floor area. Maximise the openable area if possible.
4. Keep east-facing glazing to a modest size: total window area should be less than 8% of the home's total floor area

Refer to the floor and elevation plans for shading location

LIGHTING/PENETRATION CALCULATIONS

ARTIFICIAL LIGHTING CALCULATION ALLOWANCES


AREA WITHIN THE CLASS 1 BUILDING	326.68 m²	
Development Total	1633.4 Watts	Area Wattage Allowance 5.0 W/m ²
AREA WITHIN THE CLASS 10 BUILDING	37.79 m²	
Development Total	113.4 Watts	Area Wattage Allowance 3.0 W/m ²
AREA WITHIN THE OUTDOOR AREAS	42.83 m²	
Development Total	171.3 Watts	Area Wattage Allowance 4.0 W/m ²

CEILING INSULATION PENETRATION ALLOWANCE

CLASS 1 MAXIMUM PENETRATION ALLOWANCE	CLASS 1 MAXIMUM PENETRATION AREA (m ²)
0.5% TOTAL INSULATED CEILING AREA	1.63

The clearance required around downlights by "Australian Standard AS/NZS 3000 – 2007 Electrical Installations" (AS/NZS 3000), introduces a significant area of uninsulated ceiling and therefore increases heat loss and gain through the ceiling.

If approved fireproof downlight covers, which can be fully covered by insulation, are specified and noted on the electrical plan by the building designer or architect, then there is no need to allow for the ceiling penetration

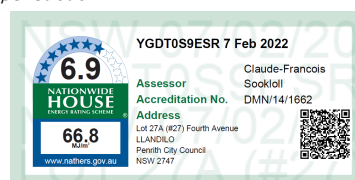

NSW ADDITIONS: BUILDING FABRIC THERMAL INSULATION

NSW 3.12.1 APPLICATION OF NSW PART 3.12.1

- (a) Compliance with NSW 3.12.1.1 satisfies NSW P2.6.1(a) for thermal insulation and thermal breaks.
- (b) NSW PART 3.12.1 only applies to thermal insulation in a Class 1 or 10 building where a development consent specifies that the insulation is to be provided as part of the development.
- (c) In (b), the term development consent has the meaning given by the Environmental Planning and Assessment Act 1979.
- (d) The Deemed-to-Satisfy Provisions of this Part for thermal breaks apply to all Class 1 buildings and Class 10a buildings with a conditioned space.

NSW 3.12.1.1 COMPLIANCE WITH BCA PROVISIONS

- (a) Thermal insulation in a building must comply with the national BCA provisions of 3.12.1.1.
- (b) A thermal break must be provided between the external cladding and framing in accordance with national BCA provisions of—
 - (i) 3.12.1.2(c) for a metal framed roof; and
 - (ii) 3.12.1.4(b) for a metal framed wall.
- (c) Compensation for reduction in ceiling insulation must comply with the national BCA provisions of 3.12.1.2(e).
- (d) A floor with an in-slab or in-screed heating or cooling system must comply with the national BCA provisions of—
 - (i) 3.12.1.5(a)(ii), (iii) and (e) for a suspended floor; or
 - (ii) 3.12.1.5(c), (d) and (e) for a concrete slab-on-ground.

BUILDING SEALING & SERVICES

NSW 3.12.3 APPLICATION OF NSW PART 3.12.3

- (a) Compliance with NSW 3.12.3.1 satisfies NSW P2.6.1(b) for building sealing.
- (b) NSW Part 3.12.3 is not applicable to—
 - (i) existing buildings being relocated; or
 - (ii) Class 10a buildings—
 - (A) without a conditioned space; or
 - (B) for the accommodation of vehicles; or
 - (iii) parts of buildings that cannot be fully enclosed; or
 - (iv) a permanent building opening, in a space where a gas appliance is located, that is necessary for the safe operation of a gas appliance; or
 - (v) a building in climate zones 2 and 5 where the only means of air-conditioning is by using an evaporative cooler.

NSW 3.12.3.1 COMPLIANCE WITH BCA PROVISIONS


The sealing of a building must comply with the national BCA provisions 3.12.3.1 to 3.12.3.6.

NSW 3.12.5 SERVICES: APPLICATION OF NSW PART 3.12.5

- (a) Compliance with NSW 3.12.5.1 satisfies NSW P2.6.2 for services.
- (b) NSW Part 3.12.5 is not applicable to existing services associated with existing buildings being relocated.

NSW 3.12.5.1 COMPLIANCE WITH BCA PROVISIONS

Services must comply with the national BCA provisions 3.12.5.0 to 3.12.5.3.

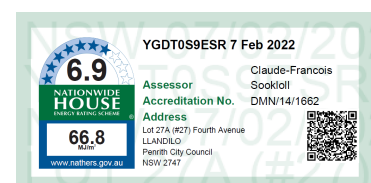

Nationwide House Energy Rating Scheme

NatHERS Certificate No. YGDT0S9ESR

Generated on 7 Feb 2022 using FirstRate5: 5.3.2a (3.21)

Property

Address Lot 27A (#27) Fourth Avenue LLANDILO , Penrith City Council, NSW, 2747
Lot/DP 27A/2147
NCC Class* Class 1a
Type New Home

Plans

Main plan 606239_v1.0 | 7/02/2022
Prepared by McDonald Jones Homes

Construction and environment

Assessed floor area (m ²)*	Exposure type
Conditioned* 284.9	suburban
Unconditioned* 46.8	NatHERS climate zone
Total 331.7	28 Richmond
Garage 33.6	



Accredited assessor

Name Claude-Francois Sookloll
Business name Energy Advance
Email energy@energyadvance.com.au
Phone 1300 850 228
Accreditation No. DMN/14/1662
Assessor Accrediting Organisation Design Matters National
Declaration of interest Declaration completed: no conflicts

National Construction Code (NCC) requirements

The NCC's requirements for NatHERS-rated houses are detailed in 3.12.0(a)(i) and 3.12.5 of the NCC Volume Two. For apartments the requirements are detailed in J0.2 and J5 to J8 of the NCC Volume One.

In NCC 2019, these requirements include minimum star ratings and separate heating and cooling load limits that need to be met by buildings and apartments through the NatHERS assessment. Requirements additional to the NatHERS assessment that must also be satisfied include, but are not limited to: insulation installation methods, thermal breaks, building sealing, water heating and pumping, and artificial lighting requirements. The NCC and NatHERS Heating and Cooling Load Limits (Australian Building Codes Board Standard) are available at www.abcb.gov.au.

State and territory variations and additions to the NCC may also apply.

6.9
The more stars
the more energy efficient

NATIONWIDE HOUSE
ENERGY RATING SCHEME

66.8 MJ/m²
Predicted annual energy load for heating and cooling based on standard occupancy assumptions.

For more information on your dwelling's rating see:
www.nathers.gov.au

Thermal performance

Heating **Cooling**

29.1 **37.7**
MJ/m² MJ/m²

About the rating

NatHERS software models the expected thermal energy loads using information about the design and construction, climate and common patterns of household use. The software does not take into account appliances, apart from the airflow impacts from ceiling fans.

Verification

To verify this certificate, scan the QR code or visit <https://www.fr5.com.au/QRCodeLanding?PublicId=YGDT0S9ESR> When using either link, ensure you are visiting www.FR5.com.au.



Certificate Check

Ensure the dwelling is designed and then built as per the NatHERS Certificate. While you need to check the accuracy of the whole Certificate, the following spot check covers some important items impacting the dwelling's rating.

Genuine certificate

Does this Certificate match the one available at the web address or QR code in the verification box on the front page?
Does the set of NatHERS-stamped plans for the dwelling have a Certificate number on the stamp that matches this Certificate?

Ceiling penetrations*

Does the 'number' and 'type' of ceiling penetrations (e.g. downlights, exhaust fans, etc) shown on the stamped plans or installed, match what is shown in this Certificate?

Windows

Does the installed window meet the substitution tolerances (SHGC and U-value) and window type, of the window shown on this Certificate? Substituted values must be based on the Australian Fenestration Rating Council (AFRC) protocol.

Apartment entrance doors

Does the 'External Door Schedule' show apartment entrance doors? Please note that an "external door" between the modelled dwelling and a shared space, such as an enclosed corridor or foyer, should not be included in the assessment (because it overstates the possible ventilation) and would invalidate the Certificate.

Exposure*

Has the appropriate exposure level (terrain) been applied? For example, it is unlikely that a ground-floor apartment is "exposed" or a top floor high-rise apartment is "protected".

Provisional* values

Have provisional values been used in the assessment and, if so, noted in "additional notes" below?

Additional Notes

BCA 6

Please note, a non-reflective vapour permeable wall wrap has been modelled to the framed external walls of this dwelling

Perimeter insulation has not been included in the modelling of this dwelling

Eaves indicated by the 'Horizontal shading feature* maximum projection (mm)' may not be directly opposing the respective wall (i.e. some eaves may be horizontally offset)

Where applicable, an additional 150mm has been added to the projection of all 'Horizontal shading features & eaves' to account for the Gutter & Fascia Board

Window and glazed door *type and performance*

Default* windows

Window ID	Window description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Custom* windows

Window ID	Window description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
BRD-112-01 A	ESS Awning 52 SG 4mmClr	6.54	0.67	0.64	0.7
BRD-139-01 A	Essential Sliding Stacker Door SG 4mmClr	6.24	0.74	0.7	0.78
BRD-024-01 A	ESS Double Hung Window (52mm) SG 3Clr	6.3	0.75	0.71	0.79

* Refer to glossary



BRD-001-01 A	ESS Sliding Window (52mm) SG 3Clr	6.43	0.76	0.72	0.8
BRD-063-19 A	SIG Fixed Lite (67mm) SG 638ClrLam	5.9	0.72	0.68	0.76
BRD-033-01 A	ESS Sliding Door (80mm) SG 4Clr	6.19	0.74	0.7	0.78

Window and glazed door *Schedule*

Location	Window ID	Window no.	Height (mm)	Width (mm)	Window type	Opening %	Orientation	Window shading device*
Master Suite	BRD-112-01 A	W09	2080	850	awning	60.0	N	No
Master Suite	BRD-139-01 A	D03	2100	3228	other	60.0	N	No
Bedroom 2	BRD-024-01 A	W03	1560	1210	double_hung	22.0	S	No
Bedroom 3	BRD-024-01 A	W02	1560	1210	double_hung	22.0	S	No
Bedroom 4	BRD-024-01 A	W01	1560	1210	double_hung	22.0	S	No
WIR 2	BRD-024-01 A	W05	1560	850	double_hung	45.0	S	No
Home Office	BRD-024-01 A	W04	1560	1810	double_hung	22.0	S	No
Home Theatre	BRD-139-01 A	D01	2100	3573	other	60.0	S	No
Children's Activities	BRD-139-01 A	D05	2100	3228	other	60.0	N	No
Kitchen/Family/- Living/Dining	BRD-001-01 A	W11	1170	2650	sliding	30.0	N	No
Kitchen/Family/- Living/Dining	BRD-063-19 A	W12	2080	1210	fixed	0.0	E	No
Kitchen/Family/- Living/Dining	BRD-139-01 A	D04	2100	3588	other	60.0	N	No
Kitchen/Family/- Living/Dining	BRD-063-19 A	W13	2080	1210	fixed	0.0	W	No
Bathroom	BRD-001-01 A	W14	1460	1570	sliding	45.0	N	No
Laundry	BRD-033-01 A	D06	2100	1570	sliding	45.0	N	No
WIP	BRD-112-01 A	W10	2080	850	awning	60.0	N	No
Ensuite Hall Pass	BRD-112-01 A	W08	2080	850	awning	60.0	E	No
Ensuite	BRD-024-01 A	W06	1800	850	double_hung	45.0	S	No
Ensuite	BRD-112-01 A	W07	2080	850	awning	60.0	E	No

Roof window *type and performance value*

Default* roof windows

Window ID	Window description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

Custom* roof windows

Window ID	Window description	Maximum U-value*	SHGC*	Substitution tolerance ranges	
				SHGC lower limit	SHGC upper limit
No Data Available					

* Refer to glossary



Roof window schedule

Location	Window ID	Window no.	Opening %	Area (m ²)	Orientation	Outdoor shade	Indoor shade
No Data Available							

Skylight type and performance

Skylight ID	Skylight description
No Data Available	

Skylight schedule

Location	Skylight ID	Skylight No.	Skylight shaft length (mm)	Area (m ²)	Orient-ation	Outdoor shade	Diffuser	Skylight shaft reflectance
No Data Available								

External door schedule

Location	Height (mm)	Width (mm)	Opening %	Orientation
Entry	2106	1877	100.0	S
Garage	2125	4800	100.0	S

External wall type

Wall ID	Wall type	Solar absorptance	Wall shade (colour)	Bulk insulation (R-value)	Reflective wall wrap*
1	STANDARD - Brick Veneer - R2.0 Batts	0.5	Medium	Glass fibre batt: R2.0 (R2.0)	No
2	VAPOUR - Framed Thick (Generic) - R2.0 Batts + VP Wrap	0.5	Medium	Glass fibre batt: R2.0 (R2.0)	No
3	STANDARD - Brick Veneer	0.5	Medium		No
4	STANDARD - Double Brick	0.5	Medium		No

External wall schedule

Location	Wall ID	Height (mm)	Width (mm)	Orientation	Horizontal shading feature* maximum projection (mm)	Vertical shading feature (yes/no)
Master Suite	1	2595	590	S	600	Yes
Master Suite	1	2595	4740	E	600	Yes
Master Suite	1	2595	1641	N	600	Yes
Master Suite	1	2595	4904	N	4572	Yes
Bedroom 2	2	2595	3775	S	0	Yes
Bedroom 3	2	2595	3100	S	0	Yes
Bedroom 4	1	2595	3350	S	600	Yes
Bedroom 4	1	2595	3568	W	601	Yes
WIR 2	2	2595	1950	S	600	Yes
Home Office	1	2595	4000	S	600	Yes
Home Office	1	2595	710	E	600	Yes
Home Office	1	2595	710	W	2322	Yes

* Refer to glossary



Home Theatre	1	2595	5050	S	3608	Yes
Home Theatre	1	2595	710	E	2330	Yes
Home Theatre	1	2595	710	W	600	Yes
Entry	1	2595	2651	S	2821	Yes
Children's Activities	1	2595	4045	N	600	Yes
Children's Activities	1	2595	860	W	600	Yes
Children's Activities	1	2595	600	N	600	Yes
Kitchen/Family/Living/Dining	1	2595	4335	N	600	Yes
Kitchen/Family/Living/Dining	1	2595	2125	E	600	Yes
Kitchen/Family/Living/Dining	1	2595	5027	N	604	No
Kitchen/Family/Living/Dining	1	2595	2102	W	609	Yes
Kitchen/Family/Living/Dining	1	2595	601	N	600	Yes
Bathroom	1	2595	2980	N	600	Yes
Laundry	1	2595	1750	N	600	Yes
WIP	1	2595	860	E	5383	Yes
WIP	1	2595	2400	N	600	Yes
Ensuite Hall Pass	1	2595	1425	E	600	Yes
Ensuite	2	2595	3930	S	600	Yes
Ensuite	1	2595	3340	E	600	Yes
Garage	3	2665	5920	W	600	No
Garage	4	2665	5494	S	600	Yes
Garage	3	2665	5675	N	610	Yes

Internal wall type

Wall ID	Wall type	Area (m ²)	Bulk insulation
1	STANDARD - Internal Stud Walls	265.8	
2	STANDARD - Internal Stud Walls -R2.0 Batts	26.5	Glass fibre batt: R2.0 (R2.0)

Floor type

Location	Construction	Area (m ²)	Sub-floor ventilation	Added insulation (R-value)	Covering
Master Suite	FR5 - 300mm waffle pod, 85mm concrete (R0.63)	31	Enclosed	R0.0	Carpet
Bedroom 2	FR5 - 300mm waffle pod, 85mm concrete (R0.63)	12.2	Enclosed	R0.0	Carpet
Bedroom 3	FR5 - 300mm waffle pod, 85mm concrete (R0.63)	12.2	Enclosed	R0.0	Carpet
Bedroom 4	FR5 - 300mm waffle pod, 85mm concrete (R0.63)	13.1	Enclosed	R0.0	Carpet
WIR 2	FR5 - 300mm waffle pod, 85mm concrete (R0.63)	7	Enclosed	R0.0	Carpet
Home Office	FR5 - 300mm waffle pod, 85mm concrete (R0.63)	17.1	Enclosed	R0.0	Carpet
Master Suite Hall Pass	FR5 - 300mm waffle pod, 85mm concrete (R0.63)	2.3	Enclosed	R0.0	Carpet
Home Theatre	FR5 - 300mm waffle pod, 85mm concrete (R0.63)	21.6	Enclosed	R0.0	Carpet
Entry	FR5 - 300mm waffle pod, 85mm concrete (R0.63)	13.6	Enclosed	R0.0	Carpet
Home Office	FR5 - 300mm waffle pod, 85mm concrete (R0.63)	4.8	Enclosed	R0.0	Carpet

* Refer to glossary



Children's Activities	FR5 - 300mm waffle pod, 85mm concrete (R0.63)	31.5	Enclosed	R0.0	Carpet
Kitchen/Family/Living/Dining	FR5 - 300mm waffle pod, 85mm concrete (R0.63)	79.1	Enclosed	R0.0	Tiles
Hall Pass	FR5 - 300mm waffle pod, 85mm concrete (R0.63)	8.1	Enclosed	R0.0	Carpet
Linen	FR5 - 300mm waffle pod, 85mm concrete (R0.63)	2.8	Enclosed	R0.0	Carpet
Powder	FR5 - 300mm waffle pod, 85mm concrete (R0.63)	3	Enclosed	R0.0	Tiles
Bathroom	FR5 - 300mm waffle pod, 85mm concrete (R0.63)	8.3	Enclosed	R0.0	Tiles
Laundry	FR5 - 300mm waffle pod, 85mm concrete (R0.63)	4.9	Enclosed	R0.0	Tiles
WIP	FR5 - 300mm waffle pod, 85mm concrete (R0.63)	6.5	Enclosed	R0.0	Tiles
Ensuite Hall Pass	FR5 - 300mm waffle pod, 85mm concrete (R0.63)	2.4	Enclosed	R0.0	Carpet
Ensuite	FR5 - 300mm waffle pod, 85mm concrete (R0.63)	16.4	Enclosed	R0.0	Tiles
Garage	FR5 - 300mm waffle pod, 85mm concrete (R0.63)	33.6	Enclosed	R0.0	none

Ceiling type

Location	Construction material/type	Bulk insulation R-value (may include edge batt values)	Reflective wrap*
Master Suite	Plasterboard	R4.1	Yes
Bedroom 2	Plasterboard	R4.1	Yes
Bedroom 3	Plasterboard	R4.1	Yes
Bedroom 4	Plasterboard	R4.1	Yes
WIR 2	Plasterboard	R4.1	Yes
Home Office	Plasterboard	R4.1	Yes
Master Suite Hall Pass	Plasterboard	R4.1	Yes
Home Theatre	Plasterboard	R4.1	Yes
Entry	Plasterboard	R4.1	Yes
Home Office	Plasterboard	R4.1	Yes
Children's Activities	Plasterboard	R4.1	Yes
Kitchen/Family/Living/Dining	Plasterboard	R4.1	Yes
Hall Pass	Plasterboard	R4.1	Yes
Linen	Plasterboard	R4.1	Yes
Powder	Plasterboard	R4.1	Yes
Bathroom	Plasterboard	R4.1	Yes
Laundry	Plasterboard	R4.1	Yes
WIP	Plasterboard	R4.1	Yes
Ensuite Hall Pass	Plasterboard	R4.1	Yes
Ensuite	Plasterboard	R4.1	Yes
Garage	Plasterboard	R0.0	Yes

Ceiling penetrations*

Location	Quantity	Type	Diameter (mm)	Sealed/unsealed
Kitchen/Family/Living/Dining	1	Exhaust Fans	185	Sealed

* Refer to glossary



Powder	1	Exhaust Fans	250	Sealed
--------	---	--------------	-----	--------

Ceiling fans

Location	Quantity	Diameter (mm)
No Data Available		

Roof type

Construction	Added insulation (R-value)	Solar absorptance	Roof shade
Cont:Attic-Continuous	1.3	0.8	Dark



Explanatory Notes

About this report

A NatHERS rating is a comprehensive, dynamic computer modelling evaluation of a home, using the floorplans, elevations and specifications to estimate an energy load. It addresses the building layout, orientation and fabric (i.e. walls, windows, floors, roofs and ceilings), but does not cover the water or energy use of appliances or energy production of solar panels.

Ratings are based on a unique climate zone where the home is located and are generated using standard assumptions, including occupancy patterns and thermostat settings. The actual energy consumption of a home may vary significantly from the predicted energy load, as the assumptions used in the rating will not match actual usage patterns. For example, the number of occupants and personal heating or cooling preferences will vary.

While the figures are an indicative guide to energy use, they can be used as a reliable guide for comparing different dwelling designs and to demonstrate that the design meets the energy efficiency requirements in the National Construction Code. Homes that are energy efficient use less energy, are warmer on cool days, cooler on hot days and cost less to run. The higher the star rating the more thermally efficient the dwelling is.

Accredited assessors

To ensure the NatHERS Certificate is of a high quality, always use an accredited or licenced assessor. NatHERS accredited assessors are members of a professional body called an Assessor Accrediting Organisation (AAO).

Australian Capital Territory (ACT) licensed assessors may only produce assessments for regulatory purposes using software for which they have a licence endorsement. Licence endorsements can be confirmed on the ACT licensing register

Glossary

Annual energy load	the predicted amount of energy required for heating and cooling, based on standard occupancy assumptions.
Assessed floor area	the floor area modelled in the software for the purpose of the NatHERS assessment. Note, this may not be consistent with the floor area in the design documents.
Ceiling penetrations	features that require a penetration to the ceiling, including downlights, vents, exhaust fans, rangehoods, chimneys and flues. Excludes fixtures attached to the ceiling with small holes through the ceiling for wiring, e.g. ceiling fans; pendant lights, and heating and cooling ducts.
Conditioned	a zone within a dwelling that is expected to require heating and cooling based on standard occupancy assumptions. In some circumstances it will include garages.
Custom windows	windows listed in NatHERS software that are available on the market in Australia and have a WERS (Window Energy Rating Scheme) rating.
Default windows	windows that are representative of a specific type of window product and whose properties have been derived by statistical methods.
Entrance door	these signify ventilation benefits in the modelling software and must not be modelled as a door when opening to a minimally ventilated corridor in a Class 2 building.
Exposure category - exposed	terrain with no obstructions e.g. flat grazing land, ocean-frontage, desert, exposed high-rise unit (usually above 10 floors).
Exposure category - open	terrain with few obstructions at a similar height e.g. grasslands with few well scattered obstructions below 10m, farmland with scattered sheds, lightly vegetated bush blocks, elevated units (e.g. above 3 floors).
Exposure category - suburban	terrain with numerous, closely spaced obstructions below 10m e.g. suburban housing, heavily vegetated bushland areas.
Exposure category - protected	terrain with numerous, closely spaced obstructions over 10 m e.g. city and industrial areas.
Horizontal shading feature	provides shading to the building in the horizontal plane, e.g. eaves, verandahs, pergolas, carports, or overhangs or balconies from upper levels.

AAOs have specific quality assurance processes in place, and continuing professional development requirements, to maintain a high and consistent standard of assessments across the country. Non-accredited assessors do not have this level of quality assurance or any ongoing training requirements.

Any questions or concerns about this report should be directed to the assessor in the first instance. If the assessor is unable to address these questions or concerns, the AAO specified on the front of this certificate should be contacted.

Disclaimer

The format of the NatHERS Certificate was developed by the NatHERS Administrator. However the content of each individual certificate is entered and created by the assessor to create a NatHERS Certificate. It is the responsibility of the assessor who prepared this certificate to use NatHERS accredited software correctly and follow the NatHERS Technical Notes to produce a NatHERS Certificate.

The predicted annual energy load in this NatHERS Certificate is an estimate based on an assessment of the building by the assessor. It is not a prediction of actual energy use, but may be used to compare how other buildings are likely to perform when used in a similar way. Information presented in this report relies on a range of standard assumptions (both embedded in NatHERS accredited software and made by the assessor who prepared this report), including assumptions about occupancy, indoor air temperature and local climate.

Not all assumptions that may have been made by the assessor while using the NatHERS accredited software tool are presented in this report and further details or data files may be available from the assessor.



National Construction Code (NCC) Class	the NCC groups buildings by their function and use, and assigns a classification code. NatHERS software models NCC Class 1, 2 or 4 buildings and attached Class 10a buildings. Definitions can be found at www.abcb.gov.au .
Opening Percentage	the openability percentage or operable (moveable) area of doors or windows that is used in ventilation calculations.
Provisional value	an assumed value that does not represent an actual value. For example, if the wall colour is unspecified in the documentation, a provisional value of 'medium' must be modelled. Acceptable provisional values are outlined in the NatHERS Technical Note and can be found at www.nathers.gov.au
Reflective wrap (also known as foil)	can be applied to walls, roofs and ceilings. When combined with an appropriate airgap and emissivity value, it provides insulative properties.
Roof window	for NatHERS this is typically an operable window (i.e. can be opened), will have a plaster or similar light well if there is an attic space, and generally does not have a diffuser.
Shading device	a device fixed to windows that provides shading e.g. window awnings or screens but excludes eaves.
Shading features	includes neighbouring buildings, fences, and wing walls, but excludes eaves.
Solar heat gain coefficient (SHGC)	the fraction of incident solar radiation admitted through a window, both directly transmitted as well as absorbed and subsequently released inward. SHGC is expressed as a number between 0 and 1. The lower a window's SHGC, the less solar heat it transmits.
Skylight (also known as roof lights)	for NatHERS this is typically a moulded unit with flexible reflective tubing (light well) and a diffuser at ceiling level.
U-value	the rate of heat transfer through a window. The lower the U-value, the better the insulating ability.
Unconditioned	a zone within a dwelling that is assumed to not require heating and cooling based on standard occupancy assumptions.
Vertical shading features	provides shading to the building in the vertical plane and can be parallel or perpendicular to the subject wall/window. Includes privacy screens, other walls in the building (wing walls), fences, other buildings, vegetation (protected or listed heritage trees).