

LANDSCAPE INSET
SCALE 1:200

PROPOSED WAREHOUSE

TREES AND SHRUBS TO NOT COMPROMISE 'ASPECTS SUCH AS SIGHT DISTANCES TO BOTH PEDESTRIANS AND OTHER VEHICLES...DURING THE LIFE OF THE PLANTINGS' - AS 2890.1-2004

REFER TO HYDRAULICS ENGINEERS PLAN FOR OSD / DWARF WALL DETAILS - MULCH OSD WITH NON FLOATABLE DECORATIVE GRAVEL. ALL FINISHED GROUND LEVELS AS PER HYDRAULICS ENGINEERS DETAILS.


GENERAL NOTES:-

- * LANDSCAPE CONTRACTOR TO CHECK DA CONDITIONS AND STAMPED LANDSCAPE PLAN BEFORE COMMENCING WORKS TO ENSURE NO ADDITIONS / AMENDMENTS TO PLAN.
- * GARDEN BEDS IN OSD BASIN TO CONSIST OF NON FLOATABLE DECORATIVE GRAVEL.
- * REFER TO HYDRAULICS ENGINEERS PLAN FOR OSD DETAILS / FINAL LEVELS.
- * MULCHED PLANTING BEDS TO BE A MINIMUM DEPTH OF 75MM AS SELECTED.
- * CONTRACTORS RESPONSIBILITY TO CHECK AND ADJUST SOIL pH AS REQUIRED.
- * PROVIDE TIMBER EDGE AS A MINIMUM BENEATH FENCING / GATES TO DEFINE TURF AND GARDEN BEDS / PATHWAYS. EDGING TO BE PROVIDED TO ALL AREAS WHERE DIFFERING MATERIALS MEET, ie TURF / GARDEN, TURF / GRAVEL PATH ETC.
- * WEED MAT BENEATH GRAVEL PATHWAYS REQUIRED TO LIMIT MUD TRACKING.
- * PREMIUM ORGANIC GARDEN MIX TO BE USED.
- * ALL PLANTS TO BE HEALTHY AND VIGOROUS.
- * CONTRACTOR TO MAKE GOOD TURF ON NATURE STRIP POST CONSTRUCTION.
- * DO NOT SCALE ARCHITECTURAL SETOUT FROM LANDSCAPE DRAWING.
- * EXISTING TREE SPREAD APPROXIMATE ONLY. REFER TO TREE REPORT WHEN APPLICABLE.
- * SITE SURVEY PROVIDED BY OTHERS.
- * BUFFALO TURF PREFERRED OVER KIKUYU.


- (A) RESTRICTION ON THE USE OF LAND
- (B) EASEMENT FOR UNDERGROUND CABLES 1 WIDE (DP 286568)
- (C) EASEMENT FOR PADMOUNT SUBSTATION 2.75 WIDE (DP 286568)

TYPICAL PLANT SELECTION CRITERIA - AS2303-2015
'TREE STOCK FOR LANDSCAPE USE' FOR FULL SPEC.

- ENSURE GOOD HEALTH AND VIGOUR. ENSURE FREEDOM FROM PESTS, DISEASES AND INJURY.
- SPECIMENS SHOULD BE SELF SUPPORTING AT TIME OF PLANTING - STAKING ONLY TO BE USED WHEN NECESSARY- 1 GROWING SEASON MAX.
- ENSURE EVIDENCE OF STEM TAPER - (INCREASE IN CALIPER DOWN THE STEM).
- PRUNING:-
*ENSURE CLEAN STEM HEIGHT DOES NOT EXCEED 40% OF PLANT HEIGHT.
*ENSURE CUTS ARE AT BRANCH COLLAR ARE CLEAN WITH NO TEARS.
- ENSURE APICAL DOMINANCE FOR TREES WITH TYPICAL EXCURRENT FORM - LEADER DEVIATION <15%.
- ENSURE GOOD CROWN SYMMETRY AND SOUND STEM JUNCTIONS - NO INCLUDED BARK.
- ENSURE SPECIMENS / BATCHES ARE CLEARLY LABELED - NOTING SPECIES CULTIVAR / VARIETY.
- ENSURE SPECIMENS ARE FREE OF GIRDLING AND SUCKERING ROOTS.
- ENSURE TRUNK POSITION IS WITHIN 10% OF POT CENTRE. IF TREE IS GRAFTED ENSURE SCION AND ROOTSTOCK ARE SOUND.

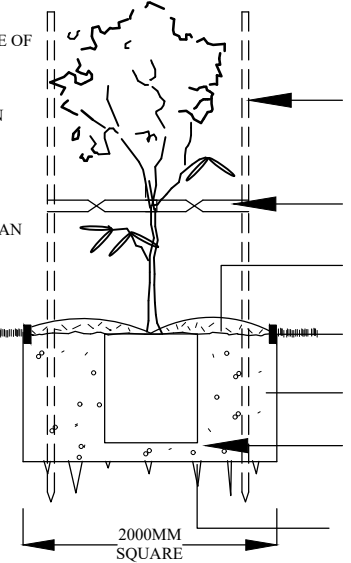

45-75LTR TYPICAL PLANTING
(NTS)

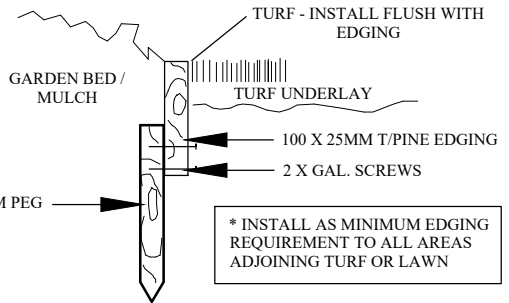


TYPICAL EDGING
(NTS)

TYPICAL PLANTING CRITERIA

- *SEEK ADVICE BEFORE SUBSTITUTING SPECIES
- *REPLACEMENTS TO BE MADE WITHIN 12 MONTHS
- 3 x 40MM HARDWOOD STAKES AS REQUIRED. DON'T PIERCE ROOT BALL
- (NOTE:- ONLY REQUIRED IN WINDY ENVIRONMENTS, VERY SANDY SOIL AND VERY WET CLAY - IF STAKING REQUIRED - REMOVE AS SOON AS PRACTICALLY POSSIBLE).
- 50MM WIDE JUTE WEBBING - TWIST ONCE AND GAL. STAPLE TO OUTSIDE OF STAKE. ENSURE TREE HAS AMPLE MOVEMENT
- 75 - 100MM SELECTED MULCH - DISH AROUND BASE OF TRUNK. TOP OF ROOT BALL TO FINISH FLUSH WITH TOP OF SOIL
- SELECTED EDGING - REFER TO DETAIL
- EXCAVATE HOLE AND INCORPORATE SOIL AMENDMENTS TO 30% MAX. IF REQUIRED.
- TAMP SOIL GENTLY AROUND AND BENEATH ROOT BALL SO ROOT BALL DOES NOT MOVE - WATER WEEKLY FOR MINIMUM 4 WEEKS TO ESTABLISH.
- SCARIFY SUB SOIL AND SIDES TO 100MM MINIMUM IN HEAVY CLAY SOILS. MAY BE REQUIRED TO MOUND PLANT.

PLANT SCHEDULE				
BOTANIC NAME	KEY	QTY	POT SIZE	HT (M)
TREES				
WATERHOUSIA FLORIBUNDA (WEeping LILLY PILLY)*	WF	3	45L	10+
SHRUBS				
SYZYGIUM 'RESILIENCE' (LILLY PILLY)*	SR	21	200MM	TRIM
TRACHELOSPERMUM JASMINOIDES (STAR JASMINE)	TJ	17	150MM	TRIM

*NATIVE SPECIES

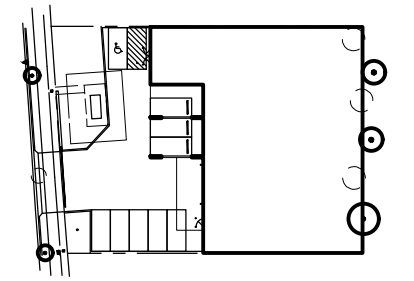

SITE PLAN
SCALE 1:1000

MONACO
DESIGNS PL
mb: 0409123200
email: paul@monaco.net.au

PROJECT:
PROPOSED WAREHOUSE

ADDRESS:
4 JOHNSON PLACE
CRANEBROOK

CLIENT:
C/o- APEX BUILDING SYSTEMS

TITLE:
DA LANDSCAPE CONCEPT

DATE: 16.12.21 - A	SCALE: 1 : 200 - A3	SHEET No: 1 OF 1
JOB No. 6017	DRAWN: CJ / PM	

LANDSCAPE PLANS
ARBORICULTURAL REPORTS
VEGETATION MANAGEMENT PLANS

STREET TREES AND TURF TO BE PROTECTED DURING CONSTRUCTION. ANY DAMAGE TO TURF AND STREET TREE TO BE RECTIFIED AS PART OF THE LANDSCAPE WORKS. TREE PROTECTION SHALL COMPLY WITH AUSTRALIAN STANDARD 4970-2009 - 'PROTECTION OF TREES ON DEVELOPMENT SITES' (IF NO DETAILED ARBORICULTURAL IMPACT REPORT IS REQUIRED).

NOTE:- MONACO DESIGNS PL RESERVES THE RIGHT NOT TO UNDERTAKE NOR SUPPLY CERTIFICATION FOR OCCUPATION CERTIFICATE.
NOTE:- TO AID COMPLIANCE WITH BASIX LEGISLATION, PLANTS (WHERE APPLICABLE) HAVE BEEN SELECTED FROM THE LOCAL CITY COUNCIL / SHIRE PLANT LISTS.
NOTE:- LOCATION OF SEWER MAINS / LINES, WATER PIPES, UNDERGROUND ELECTRICITY AND OTHER SERVICES MUST BE OBTAINED PRIOR TO COMMENCEMENT OF ANY WORK ON SITE. DIAL BEFORE YOU DIG 1100.

CONTRACTORS NOTE:- CALCULATED AREAS DETERMINED BY CAD AND HAVE BEEN ROUNDED UP FOR USE AS A GUIDE ONLY. ALLOW STANDARD PERCENTAGES FOR CUTTING AND WASTAGE. CONFIRM DIMENSIONS AND NUMBERS PRIOR TO QUOTING / ORDERING.
COPYRIGHT:- THIS PLAN AND DESIGN IS THE PROPERTY OF MONACO DESIGNS PL. IT IS NOT TO BE COPIED OR REPRODUCED WITHOUT THE WRITTEN PERMISSION OF THE COMPANY. REPRODUCTION PARTLY OR IN FULL CONSTITUTES AN INFRINGEMENT OF COPYRIGHT. FULL TERMS AND CONDITIONS CAN BE OBTAINED FROM MONACO DESIGNS WEBSITE, OR UPON REQUEST. THIS PLAN MAY ONLY BE UTILISED FOR ITS INTENDED PURPOSE ONCE PAYMENT HAS BEEN RECEIVED IN FULL, OR AS PER OUR LETTER OF AGREEMENT.
UNAUTHORISED USAGE, REPRODUCTION OR STORAGE SHALL BE TAKEN AS AN ACCEPTANCE OF A USAGE FEE OF \$2200 PER PLAN / SHEET OR PART THEREOF FOR EACH AND EVERY USE.

