




MBROSE
CADDENS



ner
ks
nywhere

PLUNGE POOL DATA SHEET

STAINLESS STEEL PLUNGE POOLS | 304 GRADE
MANUFACTURED BY DESIGNER TANKS

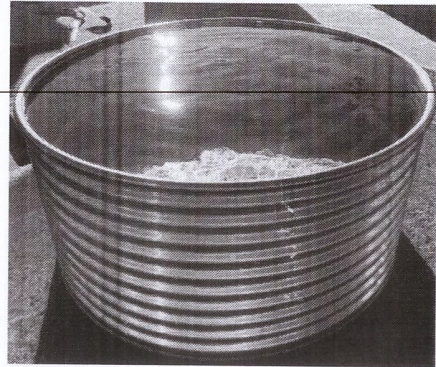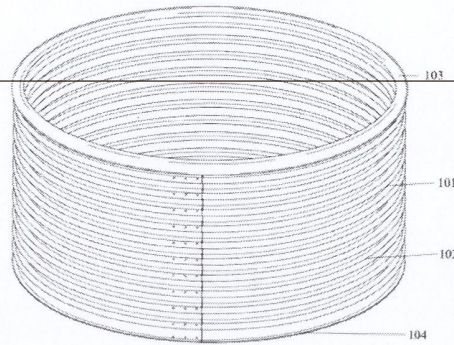

Material Guide

- 101 - 304 Grade Stainless Steel 0.55 Thickness
- 102 - Custom Orb Corrugated Profile
- 103 - 38mm Stainless Steel curved Tube
- 104- 304 Grade Stainless Steel 0.55 Thickness base material

Base Preparation

- We Recommend 100mm 20MPA Concrete Slab with F72 reinforced mesh.
- The slab should be 100mm larger than the Plunge Pool all the way around as a minimum.
- Allow the slab 7-10 days curing time before positioning the plunge pool on the slab surface.

