



PENRITH CITY COUNCIL

Note that the following details are provided by councils preferred contractor and details within have been agreed to and adopted by Childrens Services, Assets , Design and Projects and the Communications teams. The same signage is currently being installed at Wattle Glenn and Tandara childcare centres. Obviously the wording for the proposed centres relevant to the DAs will be changed to suit the individual centres -otherwise all details will be identical.




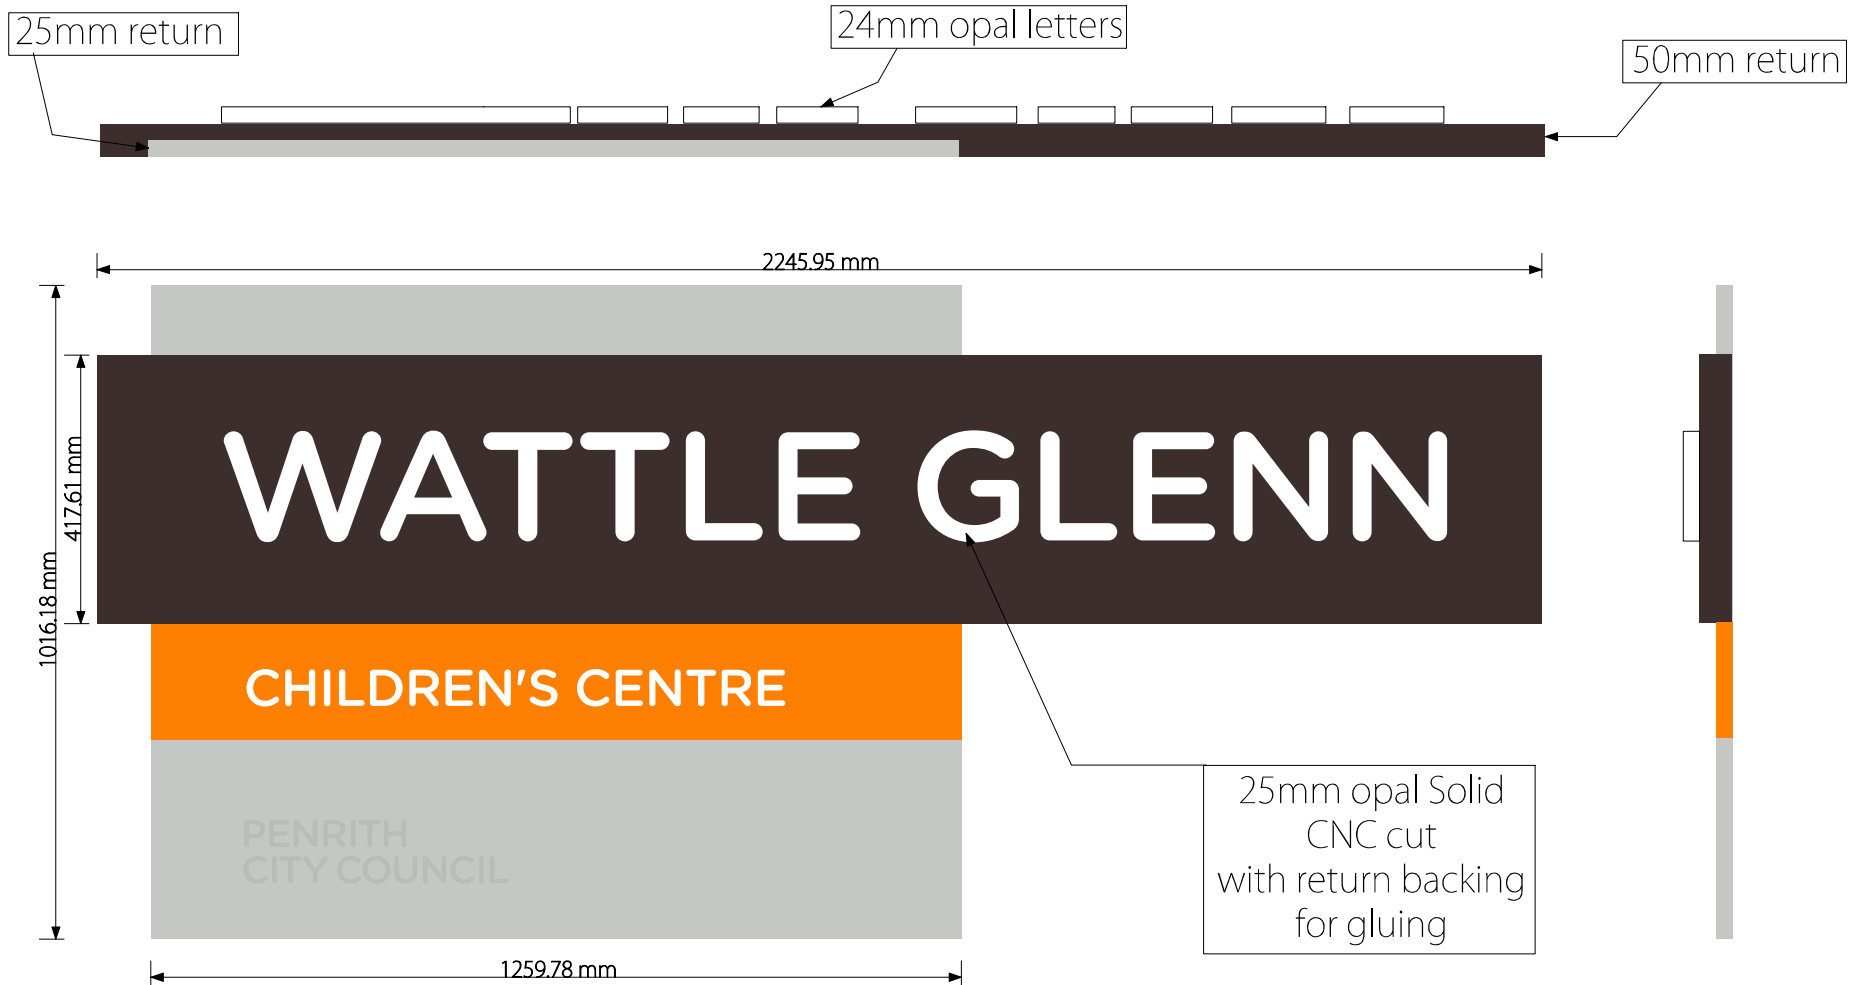

Suggested Materials: Aluminum frame with grooved and folded 3mm aluminum panels powder coated in the closest colour from the Dulux powder coating range. (Grey and the Brown) Orange to be Avery 900 series vinyl.

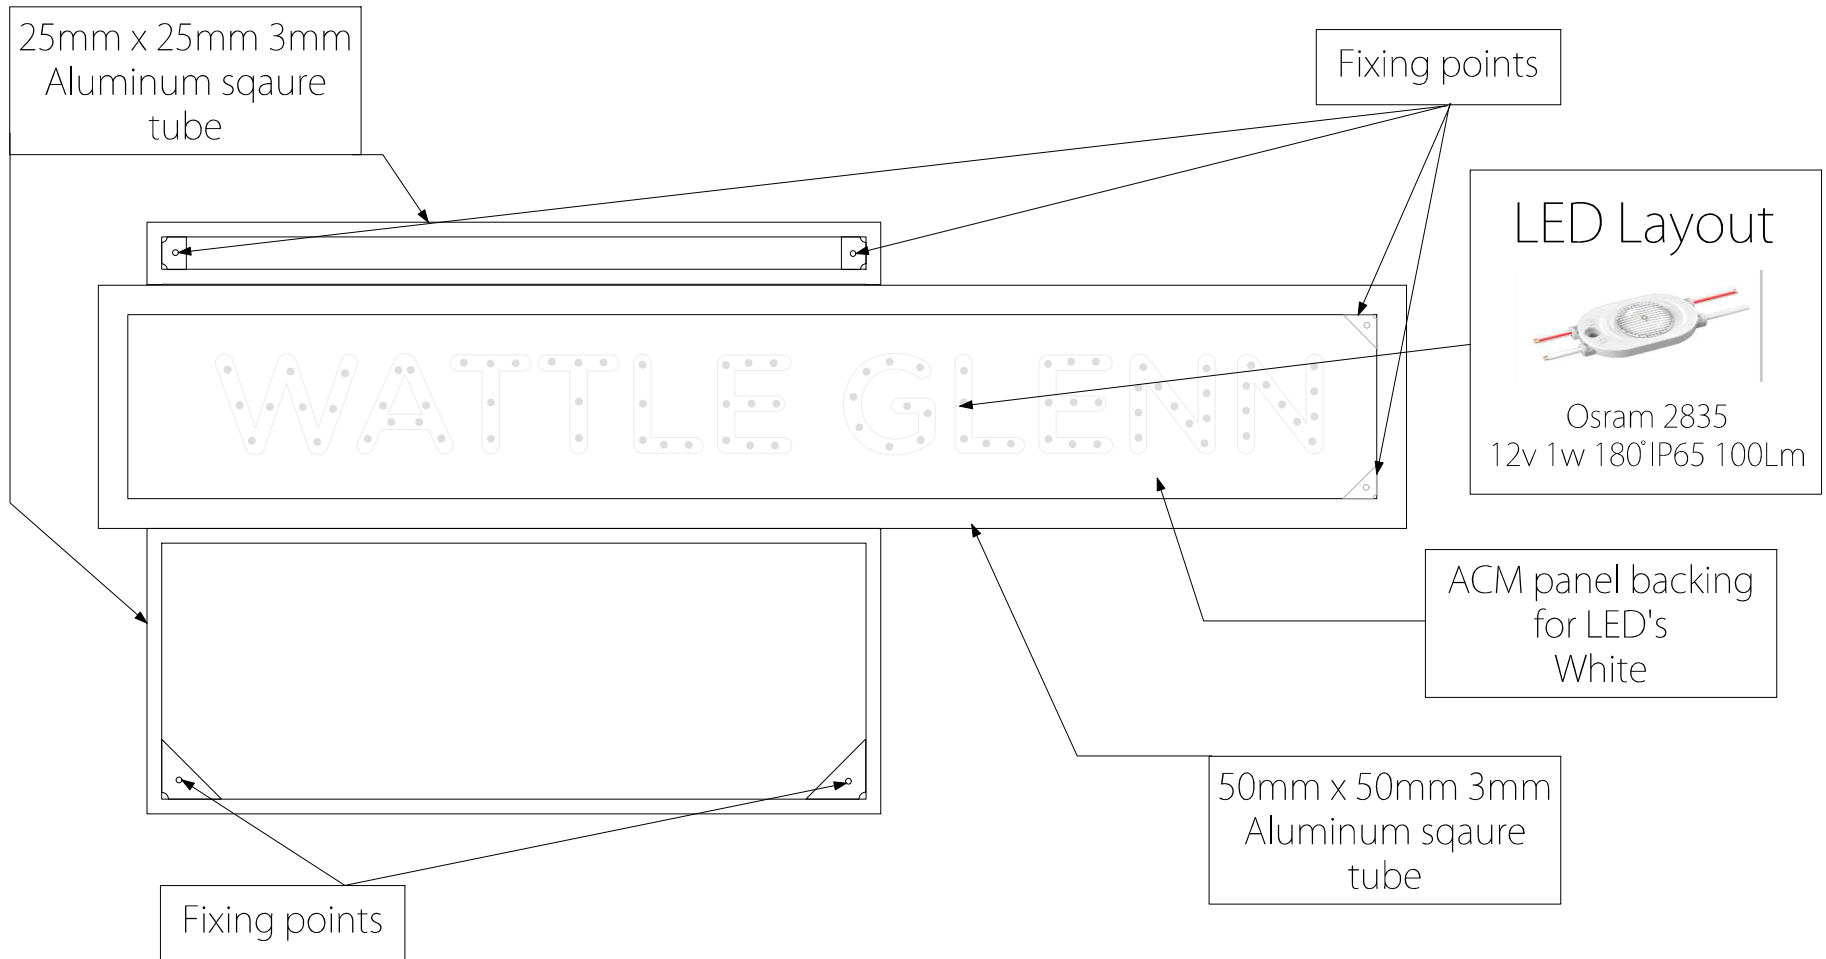

Having three sections for the face, They can be easy to replace
and even keep a couple of the top and bottom panels in stock ready to install

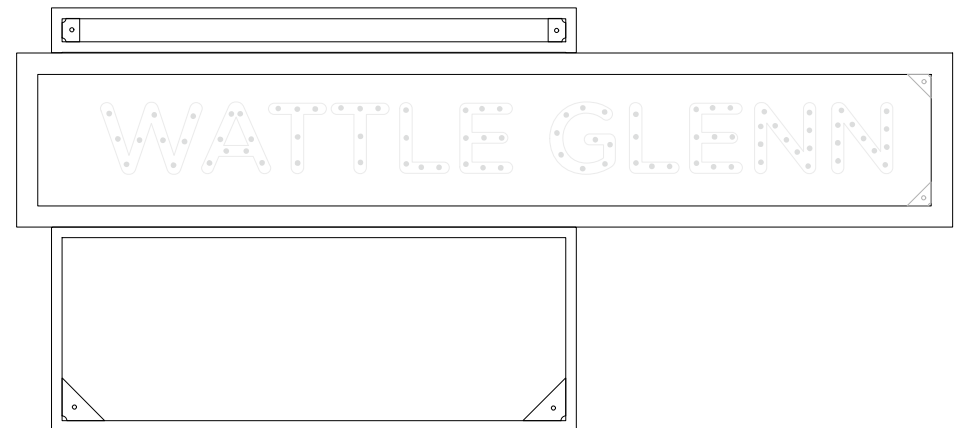

All panels to be fixed to frame work with security screws







30mm Solid Opal Acrylic
CNC cut with 3mm backing
for attaching to panel



Light tray with LEDs
then face installed

Glued acrylic letters
and returns

