

TYPICAL TREE PROTECTION
DETAIL - (NTS)
(IF NO ARBORIST REPORT REQUIRED)

GENERAL NOTES:-

- * LANDSCAPE CONTRACTOR TO CHECK DA CONDITIONS AND STAMPED LANDSCAPE PLAN BEFORE COMMENCING WORKS TO ENSURE NO ADDITIONS / AMENDMENTS TO PLAN.
- * GARDEN BEDS IN OSD BASIN TO CONSIST OF NON-FLOATABLE DECORATIVE GRAVEL.
- * REFER TO HYDRAULICS ENGINEERS PLAN FOR OSD DETAILS / FINAL LEVELS.
- * MULCHED PLANTING BEDS TO BE A MINIMUM DEPTH OF 75MM AS SELECTED.
- * CONTRACTORS RESPONSIBILITY TO CHECK AND ADJUST SOIL pH AS REQUIRED.
- * PROVIDE TIMBER EDGE AS A MINIMUM BENEATH FENCING / GATES TO DEFINE TURF AND GARDEN BEDS / PATHWAYS. EDGING TO BE PROVIDED TO ALL AREAS WHERE DIFFERING MATERIALS MEET, ie TURF / GARDEN, TURF / GRAVEL PATH ETC.
- * WEED MAT BENEATH GRAVEL PATHWAYS REQUIRED TO LIMIT MUD TRACKING.
- * PREMIUM ORGANIC GARDEN MIX TO BE USED.
- * ALL PLANTS TO BE HEALTHY AND VIGOROUS.
- * CONTRACTOR TO MAKE GOOD TURF ON NATURE STRIP POST CONSTRUCTION.
- * DO NOT SCALE ARCHITECTURAL SETOUT FROM LANDSCAPE DRAWING.
- * EXISTING TREE SPREAD APPROXIMATE ONLY. REFER TO TREE REPORT WHEN APPLICABLE.
- * SITE SURVEY PROVIDED BY OTHERS.
- * BUFFALO TURF PREFERRED OVER KIKUYU.

SITE PLAN
APPROX. 1:1000

REFER TO AS 4970-2009 -
'PROTECTION OF TREES ON
DEVELOPMENT SITES'

* IRRIGATION WITHIN TPZ AT
ARBORIST OR COUNCIL DISCRETION

EXISTING TREE SPECIES
TPZ BARRIER
TPZ
SRZ

DISTANCE AS SHOWN ON PLAN
1800MM TEMPORARY FENCE HIRE WITH
PLASTIC FEET - NO STAKES IN GROUND
UNLESS SPECIFIED
TPZ TO BE MULCHED WITH A MINIMUM
100MM RECYCLED LEAF LITTER MULCH


REFER TO INSET

PROPOSED SQUARE TURNING
CIRCLE - APPROX. 25m SQUARE

PROPOSED DRIVEWAY AS SELECTED

EXISTING TREES PROPOSED TO BE
RETAINED - AS PER SURVEY

PROPOSED BOUNDARY AND AVENUE
PLANTING (10 METRE SPACINGS) -
OPTIONS INCLUDE:-
PLATANUS ORIENTALIS
PYRUS 'CHANTICLEER'
QUERCUS PALUSTRIS
QUERCUS ROBUR
ULMUS 'GLABRA'

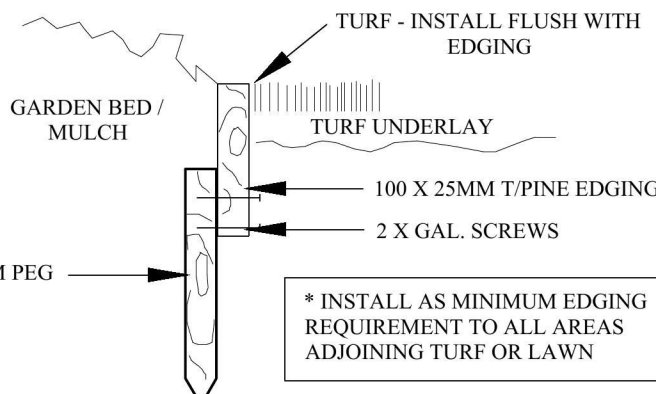

TYPICAL EDGING
(NTS)

INSERT PLAN
APPROX. 1:400

2500 10000

PROPOSED BOUNDARY AND AVENUE
PLANTING (10 METRE SPACINGS) -
OPTIONS INCLUDE:-

PLATANUS ORIENTALIS
PYRUS 'CHANTICLEER'
QUERCUS PALUSTRIS
QUERCUS ROBUR
ULMUS 'GLABRA'

PROPOSED DRIVEWAY AS SELECTED

HEDGING TO SOFTEN RETAINING WALL:-

ACMENA 'HEDGEMASTER'
BUXUS SEMPERVIRENS
CALLISTEMON 'MACARTHUR'
CAMELLIA 'LITTLE LIANE'

BORDER / UNDERPLANTING OPTIONS:-

DIANELLA 'KING ALFRED'
LIRIOPE 'EVERGREEN GIANT'
LOMANDRA 'TANIKIA'

FEATURE TREE OPTIONS:-

LIRIODENDRON TULIPERA
MAGNOLIA 'EXMOUTH'
ZELKOVA 'GREEN VASE'

UNDERPLANT WITH LAYERED ACMENA /
SYZYGIVM HEDGING

SMALL FEATURE TREE OPTIONS
IN A MOUNDED BED:-

ACER 'OCTOBER GLORY'
LAGERSTROEMIA 'FANTASY'
MAGNOLIA 'KAY PARIS'
PYRUS 'CAPITAL'

MASS PLANT BENEATH WITH:-

ARTEMISIA 'POWIS CASTLE'
LIRIOPE 'EVERGREEN GIANT'
TRACHELOSPERMUM ASIATICUM
ROSMARINUS 'BLUE LAGOON'

TYPICAL PLANT SELECTION CRITERIA - AS2303-2015
'TREE STOCK FOR LANDSCAPE USE' FOR FULL SPEC.

ENSURE GOOD HEALTH AND VIGOUR. ENSURE
FREEDOM FROM PESTS, DISEASES AND INJURY.

SPECIMENS SHOULD BE SELF SUPPORTING AT TIME OF
PLANTING - STAKING ONLY TO BE USED WHEN
NECESSARY - 1 GROWING SEASON MAX.

ENSURE EVIDENCE OF STEM TAPER - (INCREASE IN
CALIPER DOWN THE STEM).

PRUNING:-
*ENSURE CLEAN STEM HEIGHT DOES NOT EXCEED
40% OF PLANT HEIGHT.
*ENSURE CUTS ARE AT BRANCH COLLAR ARE CLEAN
WITH NO TEARS.


ENSURE APICAL DOMINANCE FOR TREES WITH
TYPICAL EXCURRENT FORM - LEADER DEVIATION
<15%.

ENSURE GOOD CROWN SYMMETRY AND SOUND
STEM JUNCTIONS - NO INCLUDED BARK.

ENSURE SPECIMENS / BATCHES ARE CLEARLY
LABELLED - NOTING SPECIES CULTIVAR / VARIETY.

ENSURE SPECIMENS ARE FREE OF GIRDLING AND
SUCKERING ROOTS.

ENSURE TRUNK POSITION IS WITHIN 10% OF POT
CENTRE. IF TREE IS GRAFTED ENSURE SCION AND
ROOTSTOCK ARE SOUND.

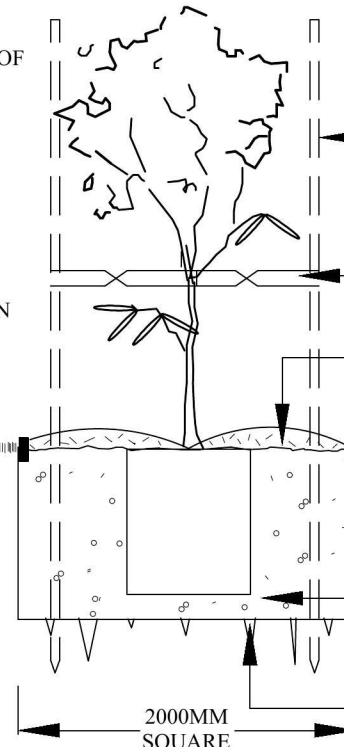

45-75LTR TYPICAL PLANTING
(NTS)

TYPICAL PLANTING CRITERIA

*SEEK ADVICE BEFORE SUBSTITUTING SPECIES
*REPLACEMENTS TO BE MADE WITHIN 12 MONTHS
3 x 40MM HARDWOOD STAKES AS REQUIRED. DON'T PIERCE ROOT BALL

(NOTE:- ONLY REQUIRED IN WINDY ENVIRONMENTS, VERY
SANDY SOIL AND VERY WET CLAY - IF STAKING REQUIRED -
REMOVE AS SOON AS PRACTICALLY POSSIBLE).

50MM WIDE JUTE WEBBING - TWIST ONCE AND GAL. STAPLE
TO OUTSIDE OF STAKE. ENSURE TREE HAS AMPLE MOVEMENT

75 - 100MM SELECTED MULCH - DISH AROUND
BASE OF TRUNK. TOP OF ROOT BALL TO FINISH
FLUSH WITH TOP OF SOIL

SELECTED EDGING - REFER TO DETAIL

EXCAVATE HOLE AND INCORPORATE SOIL
AMENDMENTS TO 30% MAX. IF REQUIRED.

TAMP SOIL GENTLY AROUND AND BENEATH ROOT BALL
SO ROOT BALL DOES NOT MOVE - WATER WEEKLY FOR
MINIMUM 4 WEEKS TO ESTABLISH.

SCARIFY SUB SOIL AND SIDES TO 100MM MINIMUM IN
HEAVY CLAY SOILS. MAY BE REQUIRED TO MOUND PLANT.

MONACO
DESIGNS PL

14 York Street, Glenbrook NSW, 2773
ph & fax: 0247395136 mb: 0409123200
email: paul@monaco.net.au

PROJECT:
PROPOSED DWELLING

ADDRESS:
88-89 NEPEAN GORGE DR.,
MULGOA

CLIENT:
MR PETER SAYER

TITLE:
DA
LANDSCAPE CONCEPT

| DATE: | SCALE: | SHEET No: |
|----------|--------------|-----------|
| 05 10 17 | 1 : 100 - A1 | 1 OF 1 |
| JOB No. | DRAWN: | |
| 4860 | P MONACO | |

TREE REPORTS
LANDSCAPE PLANS
VEGETATION MANAGEMENT PLANS